

# SUBMITTAL/TECHNICAL DATA SHEET

## INVISAGRILLE

### DESCRIPTION

A premium flush mount cold air return cover which replaces the cover for a 14"x8" opening. This cover fits into the drywall opening of 16.25"x11.625" and has a vented/slotted area of 12"x7.5"

### APPLICATION

- Designed for 1/2" for a permanent installation.
- Suitable for low and high wall installations
- Screws directly to your wall studs to allow it to be flush.
- Finish taping and seaming the perimeter edge with your drywall.
- (PRO TIP: cover the slots with painters tape to avoid drywall compound getting in them).
- Prime your wall and paint it to your wall colour
- The cold air comes primed white and ready for your paint colour.

### FEATURES

- Triple fibre reinforced cement board grill.
- Easy installation, primed and ready to paint.
- Machined outer edge to allow for screws, tape and drywall compound.
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco- Friendly Manufacturing and Non-Hazardous.

### SPECIFICATIONS

- Over 41 square inches (265 square centimeters) of open area.
- Slot Size: 0.32" x 5.8" (8mm x 147mm).
- 22 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 16" x 11.375"x0.5" (406mm x 289mm x 12mm).
- Product weight is 2 pounds (0.9kilograms)

SKU: **IG-CA14**

## FLUSH PERMANENT COLD AIR RETURN COVER



14" X 8" INVISAGRILLE



### DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

CUT YOUR DRYWALL  
OPENING TO 16.25" x 11.625"  
TO FIT THE PRODUCT INSIDE.

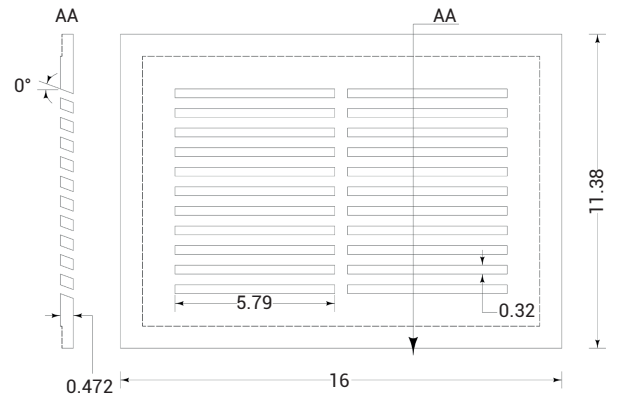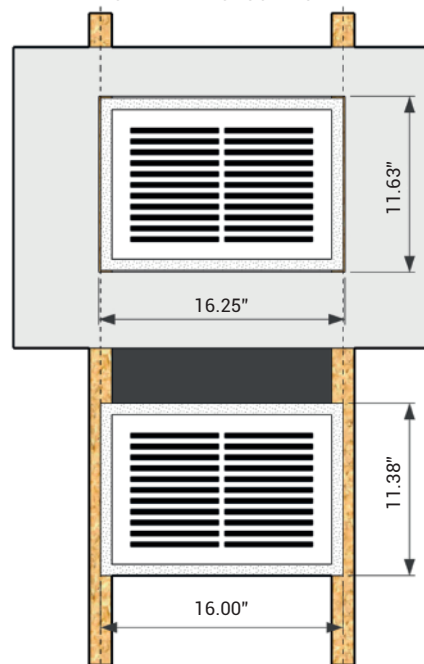


#### Material Information:

Raw Material: cement, fibres, quartz sand, non-hazardous fillers  
Density:  $1.0 < D \leq 1.2 \text{ g/cm}^3$   
Asbestos Content: 100% asbestos-free  
Fire resistance: non-combustible  
Water Absorption:  $\leq 40\%$   
Resistant Bending Strength:  $\leq 10.5 \text{ MPa dry}$   
Moisture Movement: 0.25 %  
Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing.

### PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and  
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL :			
TAGGING INSTRUCTIONS :	(signature or stamp)			



TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)