

SPECIFICATIONS

- 01. Heavy duty forged stainless steel hinges with stainless steel pins
- 02. 1-1/2" Drain coupling
- 03. Standard slam lock
- 04. Automatic hold open arm
- 06. 1/4" Aluminum diamond pattern plate
- 07. 1/4" Aluminum channel frame with recessed anchors
- 08. Heavy duty check chain
- 09. Stainless steel spring lifting mechanism

SHOP FINISH:

ALUMINUM: Mill finish HARDWARE: Type 316 Stainless steel (Unless otherwise specified)

Reinforced for 300 Lbs. Per Sq. Ft. (1464 KG. Per Sq. Meter) live load

INSTALLER NOTES:

A. Use caution. Cover is spring loaded. Do not remove safety shipping bolt until unit is to be installed and in normal horizontal operating position.

- B. Be sure unit is set on slight pitch toward drain corner.
- C. Before anchoring in place open and close door. Check to see that the door in the closed position rests on the frame all around. If not, shim under the frame at the proper corner.
- D. Do not reduce 1 1/2" drain pipe to dry well or disposal system.
- E. Bend down anchors if required

For a complete list of options visit www.AccessDoorsAndPanels.com

QTY	TYPE	SIZE WIDTH X LENGTH
	JD-1AL	4'-0" X 2'-6" [1220mm] X [762mm]
	JD-2AL	4'-0" X 4'-0" [1220mm] X [1220mm]
	JD-3AL	4'-0" X 6'-0" [1220mm] X [1830mm]
	JD-4AL	5'-0" X 5'-0"

Scan or Click




To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET



■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

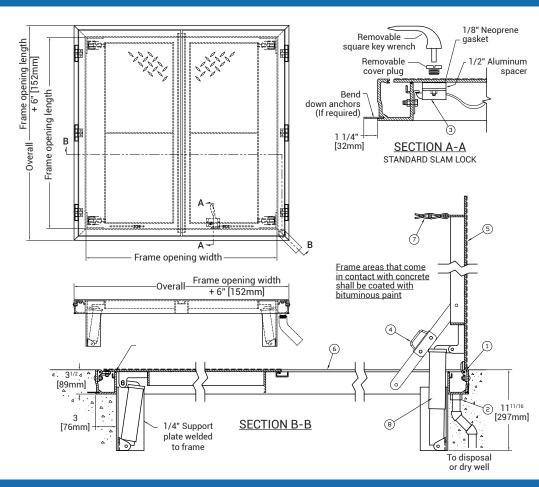

PROJECT DATA

Custom Sizes Available - Fast!

	PROJECT NAME:	QTY	W	Н	OPTIONS	
	ARCHITECT:					
	DEALER:					
	CONTRACTOR:					
	LOCATION:	SPECIAL INSTRUCTIONS:				
	DATE:					
	TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL : (signature or stamp)				
1						



TELEPHONE: 1-888-457-1275 FAX:

1-888-626-2907



PO BOX 66738 #76520, SAINT LOUIS, MO 63166-6738 USA



WEBSITE:

www.AccessDoorsAndPanels.com