

SUBMITTAL: MODEL PW & PWE FLUSH ACCESS PANELS

Models PW & PWE for Plaster Walls or Ceilings :

These access panels feature a metal flange that is recessed 3/4" from the face of the frame for application of plaster. Model PWE has additional 3" expanded metal lath wings. A continuous hinge, ensures easy opening of the panel. Screwdriver operated cam locks are provided, the size of the door determining the number. Note: Order Size is= ID of Frame (Door size)

SPECIFICATIONS PW:

Door Panel: 16 gauge steel with concealed continuous hinge mounted on long side of panels.

Frame: 16 gauge steel with 1.375" wide metal flange that is recessed 3/4" from the face of the frame for application of plaster. Minimum Size 6" x 6", Max Size 36" x 36".

Finish: Gray powdercoat primer.

Lock: Flush screwdriver-operated steel cam standard.

SPECIFICATIONS PWE:

Door Panel: 16 gauge steel with concealed continuous hinge mounted on long side of panels.

Frame: 16 gauge steel with 1.375" wide metal flange that is recessed 3/4" from the face of the frame and additional 2.65" wide wing of metal lath for a plaster application. Minimum Size 6" x 6", Max Size 36" x 36".

Finish: Gray powder coat primer.

Lock: Flush screwdriver-operated steel cam standard.

NEW- REVIT OBJECTS FOR BIM—[PW DOWNLOAD](#)
[PWE DOWNLOAD](#)

Order Format Example: PW-2424L BK


PW - Width Height Lock Special
(C Std or Option Code) Finish



PWE With 3" Expanded Metal



PW with 3/4" Plasterguard Wings

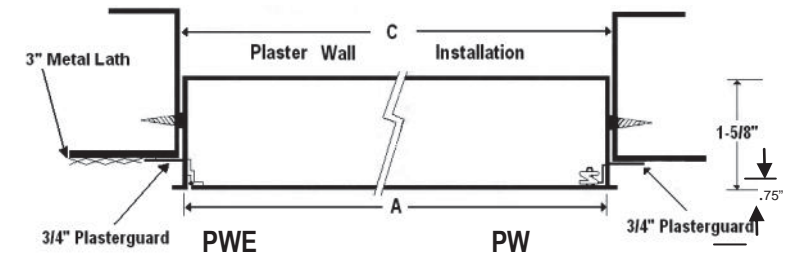

OPTIONAL FEATURES AT ADDITIONAL COST:



- Double door
- Louvered vents
- Plexiglass view window
- (Model PWG) Galvanized finish
- (Model PWS) 304 Stainless Finish
- (RD) Removable Door (no hinges)
- Optional color Code: _____ - see catalog or [website](#)
- W**-White, **R**-Red, **B**-Black, **S**-Sand
- FBK**-Flat Black, **AB**-AMS Beige, **BR**-Bronze
- SB**-SC Flat Beige, **SI** - Silver
- Custom colors - submit paint chip.

- (L) Cylinder lock installed
- (MP) Mortise cam lock prep 1-1/8" dia, 1-1/4" length #0646 Brass Retaining Ring for MP (may be required for locks by others.
- (MPI) Mortise cam lock (06431) installed
- (UM) Mortise slam lock prep
- (UMI) Mortise slam lock (06431) installed
- (LL) Mortise deadbolt prep
- (LLI) Mortise deadbolt lock (06431) installed
- (KK) Knob cam
- (CT) Torx head cam [View Lock Options Online](#)
- (CA) Hex head cam
- (SHC) Spanner head cam
- Other 1-1/8" dia. mortise cylinder by request

QTY	A - MODEL SIZE	C - WALL OPENING DIMENSIONS		SHIPPING WEIGHT APPROX.	LATCH (ES)
	WIDTH X HEIGHT	WIDTH	HEIGHT		
	12" x 12"	12 3/8"	12 3/8"	7 lbs	1
	16" x 16"	16 3/8"	16 3/8"	10 lbs	1
	16" x 20"	16 3/8"	20 3/8"	12 lbs	2
	18" x 18"	18 3/8"	18 3/8"	12 lbs	3
	24" x 24"	24 3/8"	24 3/8"	19 lbs	4
					TBD

Enter Custom Size Above with Door Size in 1/4" Increments
Only—For Example 16-1/4", 16-1/2" or 16-3/4"
Minimum Size 6" x 6", Max Size 36" x 36"

SEVERAL SIZES PW AVAILABLE FOR 1 DAY SHIPPING FROM SELECTED WAREHOUSES

 	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:

Address: PO Box 66738 #76520, Saint Louis, MO 63166-6738 Website: www.AccessDoorsAndPanels.com
Phone: 1-800-609-2917 Email: info@accessdoorsandpanels.com Fax: 1-888-626-2907