

SUBMITTAL/TECHNICAL DATA SHEET

TYPE K



- 01. Extruded aluminum frame
- 1/4" Aluminum diamond plate cover 03.
- Torsion/Cam operating mechanism 04. Standard slam lock
- 05. Removable square key wrench
- 06. Automatic hold open arm with Red vinyl

SKU: K

ALUMINUM FLOOR HATCH - WB

DIMENSIONS AND APPEARANCE

- grip
- 07. 1/8" x 1" Steel anchor strap
- 08. Continuous neoprene cushion 09. Steel cast hinges
- 10. Lock strike
- 11. Guide arm (If req'd)

SHOP FINISH: ALUMINUM: Mill finish HARDWARE: Non-corrosive materials (Unless otherwise specified)

Reinforced for 150 Lbs. Per Sq. Ft. (732 KG. Per Sq. Meter) live load


INSTALLER NOTES:

A. Use caution. Cover is spring loaded. Do not remove safety shipping bolt until unit is to be installed and in normal horizontal operating position.

B. Before anchoring in place open and close door. Check to see that the door in the closed position rests on the frame all around. If not, shim under the frame at the proper corner.

For a complete list of options visit www.AccessDoorsAndPanels.com


QTY	TYPE	SIZE WIDTH X LENGTH
	K-1	2'-0" X 2'-0" [610mm] X [610mm]
	K-2	2'-6" X 2'-6" [762mm] X [762mm]
	K-3	3'-0" X 2'-6" [914mm] X [762mm]
	K-4	3'-0" X 3'-0" [914mm] X [914mm]
	K-5	3'-6" X 3'-6" [1065mm] X [1065mm]

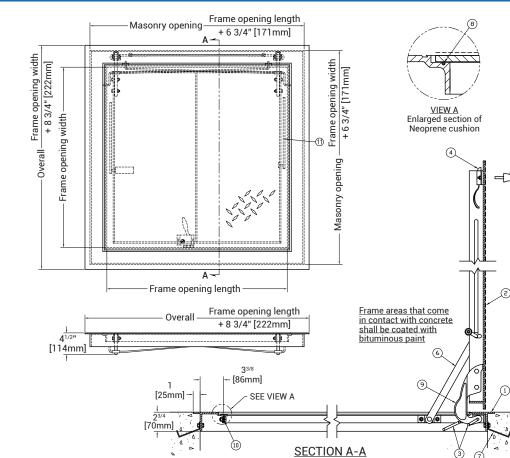

PROJECT DATA

Custom Sizes Available - Fast!

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

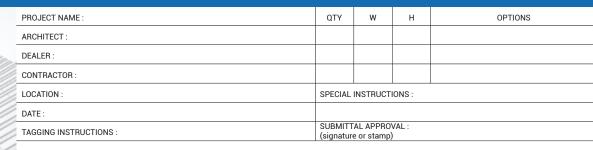





PO BOX 66738 #76520 SAINT LOUIS, MO 63166-6738 USA



WEBSITE: www.AccessDoorsAndPanels.com

- E-MAIL:
- info@AccessDoorsAndPanels.com



Scan 🗐 or 🖑 Click

To view Pricing and Additional Product Info.