



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

The KATR is designed to provide access in a suspended drywall ceiling that is part of a fire rated floor-ceiling assembly. The combination of steel and double thickness of drywall maintains the fire resistive qualities of the floor-ceiling assembly.

SPECIFICATION

CONSTRUCTION:

- Frame shall be 16 gauge steel and doors all be 18 gauge steel.

- Door shall be recessed 1 1/2" to accommodate double thickness of wall board.

- Hinge shall be exposed, continuous piano hinge.

- Locks shall be flush and screwdriver operated with 1 1/2" cam and lock studs, or shall be key operated cylinder lock with automatic dust shutter. Furnished with plastic grommet for studs only to protect hole made in wall board.

- Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel.

SKU: **KATR S**

FIRE RESISTIVE ACCESS DOOR

FOR DRYWALL CEILINGS





DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE W x H INC.	WALL/CEILING OPENING (IN.)	LATCHES	SHIP WT. LBS
12 x 12	10 1/2 x 10 1/2	1	6.7
18 x 18	16 1/2 x 16 1/2	2	11.6
24 x 24	22 1/2 x 22 1/2	2	18.1
22 x 30	20 1/2 x 28 1/2	2	19.5

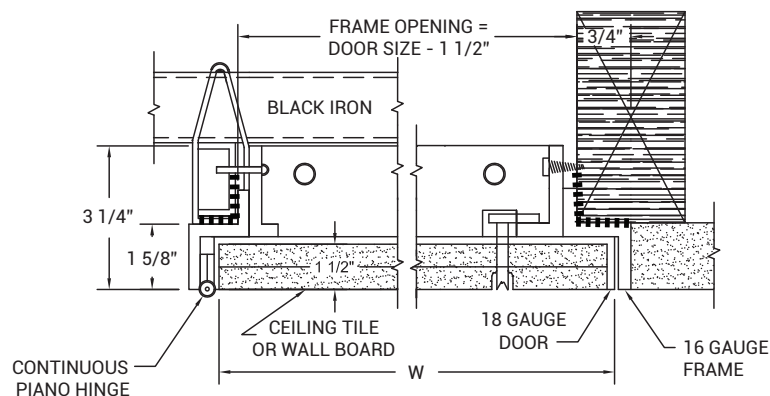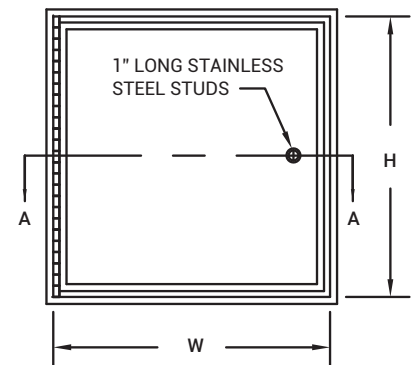

SECTION A-A

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com