



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

The KDW has a textured frame and bead so drywall joint compound can be applied in sufficient thickness to conceal flange. Prepunched holes in the flange facilitate fastening the flange to framing members with drywall screws.

SPECIFICATION

CONSTRUCTION:

- Frame shall be 16 gauge steel and door shall 14 gauge steel.

- Trim shall be galvanized steel drywall bead.

- Hinge shall be pin type hinge, spring loaded making door removable.

- Latches shall be flush and screwdriver operated, or shall be key operated cylinder lock with automatic dust shutter.

- Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel.

- When hinge side is greater than 48", door shall have a continuous piano hinge for rigidity.

SKU: **KDW S**

FLUSH ACCESS DOOR

FOR DRYWALL SURFACES





DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE W x H (IN.)	WALL/CEILING OPENING (IN.)	LATCHES	SHIP WT. LBS.
6 x 6	6 3/8 x 6 3/8	1	1.8
8 x 8	8 3/8 x 8 3/8	1	2.4
10 x 10	10 3/8 x 10 3/8	1	3.3
12 x 12	12 3/8 x 12 3/8	1	5.8
14 x 14	14 3/8 x 14 3/8	2	6.5
16 x 16	16 3/8 x 16 3/8	2	8.8
18 x 18	18 3/8 x 18 3/8	2	11.1
22 x 22	22 3/8 x 22 3/8	4	15.3
24 x 24	24 3/8 x 24 3/8	5	17.2
24 x 36	24 3/8 x 36 3/8	5	25.9

* The wall opening size for doors larger than 48 x 36 shall be 1/2" larger than the door size.

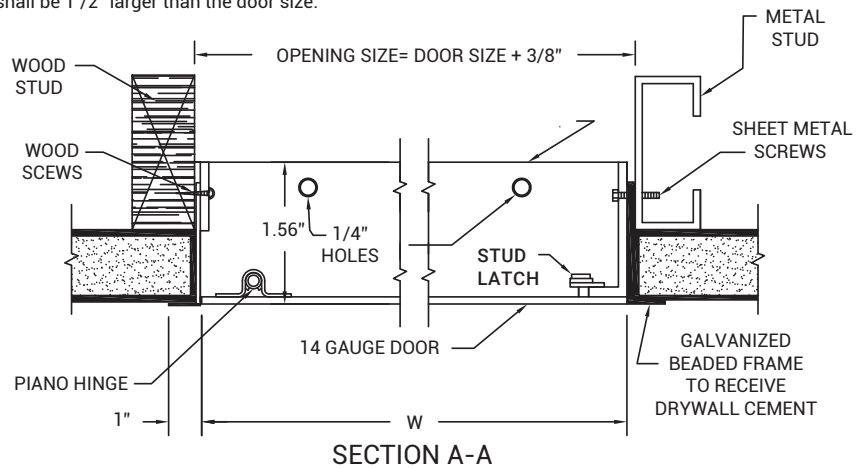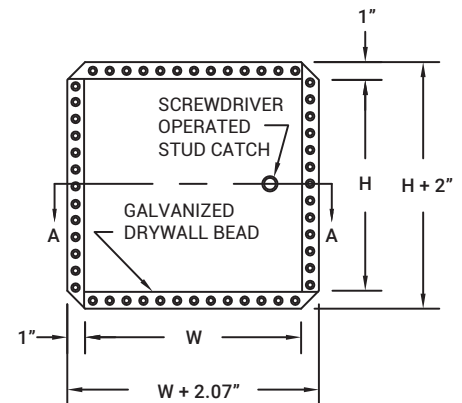

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL :			
TAGGING INSTRUCTIONS :	(signature or stamp)			

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com