



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

The KRP-250 is non-insulated and rated by Underwriters Laboratories for 1.5 hour "B" label in wall, and may be used in 2 hour fire rated wall assembly.

SPECIFICATION

CONSTRUCTION:

- Frame shall be 4 piece welded 16 gauge steel.
- Door shall be 16 gauge steel.
- Hinge shall be exposed, continuous piano hinge.
- Door shall have automatic closure, be self-latching and contain interior latch release.
- Latches shall be spring loaded sliding bolt type, keyed paddle latch, all keyed alike. Door can be prepared for a rim cylinder lock.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel doors shall have #4 satin finish.

FIRE-RATED ACCESS DOOR INSTALL IN SHEET ROCK, MASONRY, TILE OR PLASTER.

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **KRP-250FR**

NON-INSULATED FIRE RATED ACCESS DOOR

FOR WALLS ONLY





DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE W x H (IN.)	WALL/CEILING OPENING (IN.)	LATCHES	SHIP WT. LBS.
8 x 8	8 3/8 x 8 3/8	1	5.1
12 x 12	12 3/8 x 12 3/8	1	8.5
14 x 14	14 3/8 x 14 3/8	1	9.8
16 x 16	16 3/8 x 16 3/8	1	11.7
18 x 18	18 3/8 x 18 3/8	1	13.8
24 x 24	24 3/8 x 24 3/8	1	20.5
22 x 30	22 3/8 x 30 3/8	1	22.6
30 x 30	30 3/8 x 30 3/8	1	28.2
24 x 36	24 3/8 x 36 3/8	2	28.5
36 x 36	36 3/8 x 36 3/8	2	39.6

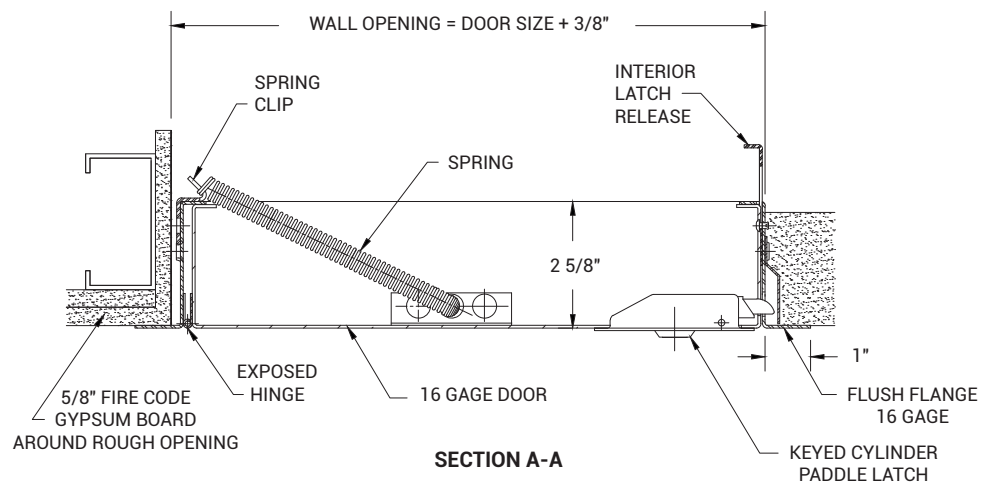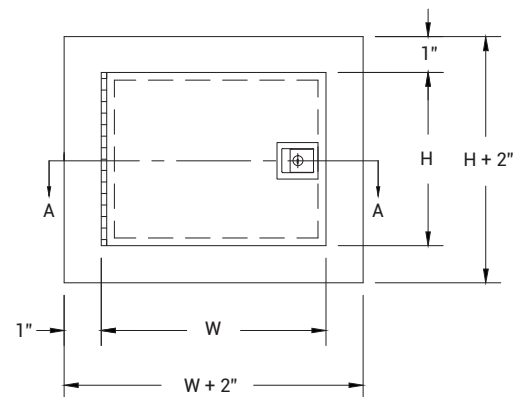

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com