



# SUBMITTAL/TECHNICAL DATA SHEET

## APPLICATION

The KRP-350FR has a textured frame and bead so drywall joint compound can be applied in sufficient thickness to conceal the flange. The KRP-350FR is insulated and rated by Underwriters Laboratories for 1.5 hour "B" label in walls and by Warnock Hersey for 3 hours in ceilings.

## SPECIFICATION

### CONSTRUCTION:

- Frame shall be 16 gauge steel, 1" wide, surrounded by galvanized drywall bead.

- Door shall be 20 gauge steel, welded pan type filled with 2" thick fire-rated insulation, and shall open to 175°, be self-latching with automatic closer and interior latch release.

- Hinge shall be continuous piano hinge.

- Latches shall be spring loaded sliding bolt type, keyed paddle latch, all keyed alike. Door can be prepared for a rim cylinder lock.

- Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel doors shall have #4 satin finish.

- \* Fire rated insulation provides a noise reduction coefficient (NRC) of 1.0.

For a complete list of options visit [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

SKU: **KRP 350FR SS**

## INSULATED FIRE-RATED ACCESS DOOR

FOR DRYWALL SURFACES




## DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

### STANDARD SIZES:

DOOR SIZE W x H (IN.)	WALL/CEILING OPENING (IN.)	NO. OF LATCHES	SHIP WT. LBS
8 x 8	8 3/8 x 8 3/8	1	6.1
12 x 12	12 3/8 x 12 3/8	1	9.3
14 x 14	14 3/8 x 14 3/8	1	12.2
16 x 16	16 3/8 x 16 3/8	1	13.6
18 x 18	18 3/8 x 18 3/8	1	18.2
12 x 24	12 3/8 x 24 3/8	1	14.9
22 x 22	22 3/8 x 22 3/8	1	23.5
24 x 24	24 3/8 x 24 3/8	1	25.7
22 x 30	22 3/8 x 30 3/8	1	26.8
24 x 30	24 3/8 x 30 3/8	1	31.0
30 x 30*	30 3/8 x 30 3/8	1	36.3
32 x 32*	32 3/8 x 32 3/8	1	39.8
22 x 36	22 3/8 x 36 3/8	2	33.1
24 x 36	24 3/8 x 36 3/8	2	38.7
36 x 36*	36 3/8 x 36 3/8	2	50.1
24 x 48*	24 3/8 x 48 3/8	2	47.1
36 x 48*	36 3/8 x 48 3/8	2	59.7
48 x 48*	48 3/8 x 48 3/8	2	85.7

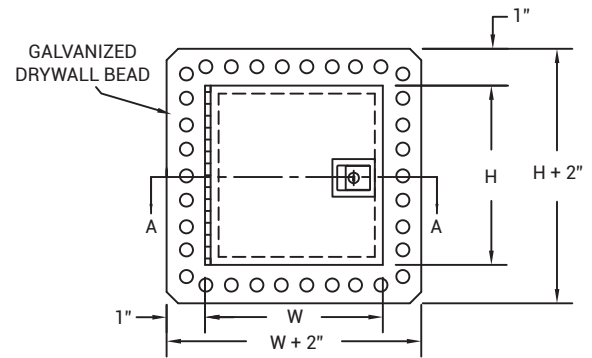

\*NOTE: All doors sized larger than 24" wide are for walls only. Not available for ceilings.

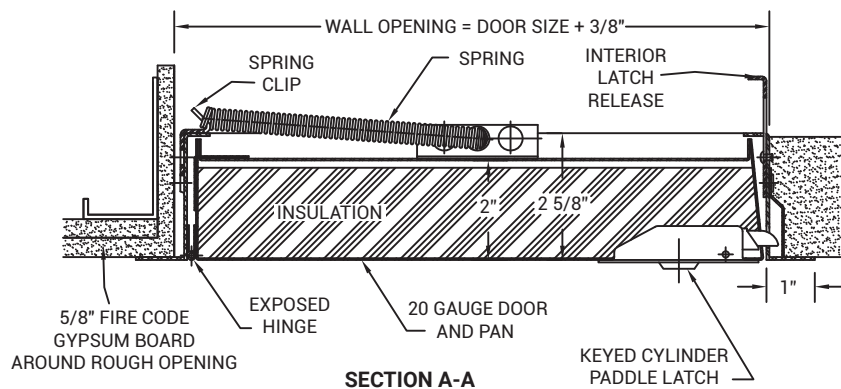

## PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)