



NON-INSULATED FIRE RATED ACCESS DOOR WITH DRYWALL BEAD

Model KRP-450FR

For Walls Only



AccessDoorsAnd Panels
 Phone: 1-800-609-2917
 Fax: 1-888-626-2907
 Address: PO Box 66738 #76520,
 Saint Louis, MO 63166-6738
 Website: www.AccessDoorsAndPanels.com

DATE

SPECIFICATIONS

GENERAL SCOPE:

Classified access frame and fire door assembly 1 1/2 hour 'B' Label Underwriters Laboratories File# A-10806. Warnock Hersey File# U51466.

CONSTRUCTION:



1. Frame shall be 16 gage steel, 1" wide, surrounded by galvanized drywall bead.
2. Door shall be 16 gage steel, and shall open to 175°, be self-latching with automatic closer and interior latch release.
3. Hinge shall be continuous piano hinge.
4. Latches shall be spring loaded sliding bolt type, keyed paddle latch, all keyed alike. Door can be prepared for a rim cylinder lock.
5. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel doors shall have #4 satin finish.

STANDARD SIZES

DOOR SIZE HXW(IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF LATCHES	SHIP WT. (LBS.)
8x8	8 3/8x8 3/8	1	4.3
12x 12	12 3/8 x 12 3/8	1	7.2
14x 14	14 3/8 x 14 3/8	1	8.3
16x 16	16 3/8 x 16 3/8	1	9.9
18x 18	18 3/8 x 18 3/8	1	11.7
24x 24	24 3/8 x 24 3/8	1	17.4
30x22	30 3/8 x 22 3/8	1	19.1
30x30	30 3/8 x 30 3/8	1	23.9
36x24	36 3/8 x 24 3/8	2	24.1
36x36	36 3/8 x 36 3/8	2	33.5

PROJECT DATA					
Project Name:					
Architect:					
Contractor:					
Agent/Customer Name:					
Tagging Instructions:					
Special Instructions:					
Click here to Online Product Page and Pricing					

PROJECT SCHEDULE					
Qty.	H	W	No. of Latches	Finish	Remarks

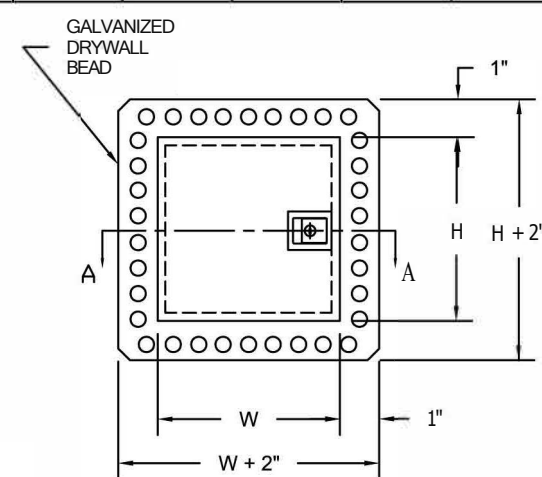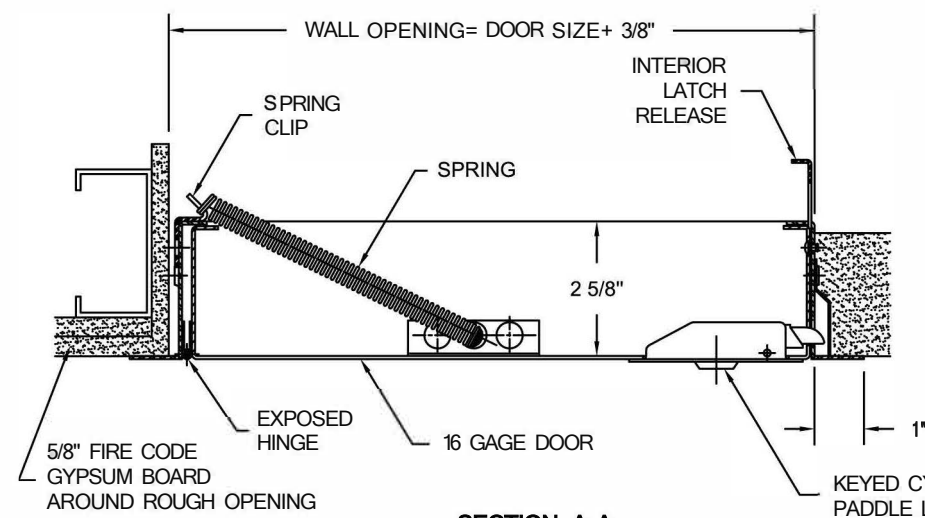

Made with Union Labor