



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

The KRP-450FR has a textured frame and bead so drywall joint compound can be applied in sufficient thickness to conceal the flange. The KRP-450FR is non-insulated for wall installation only and rated by Underwriters Laboratories for 1.5 hour "B" label in walls.

SPECIFICATION

CONSTRUCTION:

- Frame shall be 16 gage steel, 1" wide, surrounded by galvanized drywall bead.

- Door shall be 16 gauge steel, and shall open to 175°, be self-latching with automatic closer and interior latch release.

- Hinge shall be continuous piano hinge.

- Latches shall be spring loaded sliding bolt type, keyed paddle latch, all keyed alike. Door can be prepared for a rim cylinder lock.

- Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel doors shall have #4 satin finish.

SKU: **KRP 450FR**

NON-INSULATED FIRE RATED ACCESS DOOR

FOR DRYWALL BEAD





Product is White Colored

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE W x H (IN.)	WALL/CEILING OPENING (IN.)	NO. OF LATCHES	SHIP WT. LBS
8 x 8	8 3/8 x 8 3/8	1	4.3
12 x 12	12 3/8 x 12 3/8	1	7.2
14 x 14	14 3/8 x 14 3/8	1	8.3
16 x 16	16 3/8 x 16 3/8	1	9.9
18 x 18	18 3/8 x 18 3/8	1	11.7
24 x 24	24 3/8 x 24 3/8	1	17.4
22 x 30	22 3/8 x 30 3/8	1	19.1
30 x 30	30 3/8 x 30 3/8	1	23.9
24 x 36	24 3/8 x 36 3/8	2	24.1
36 x 36	36 3/8 x 36 3/8	2	33.5

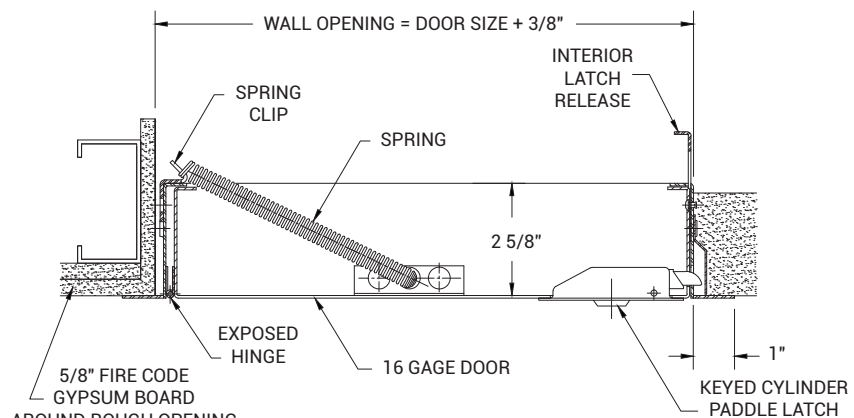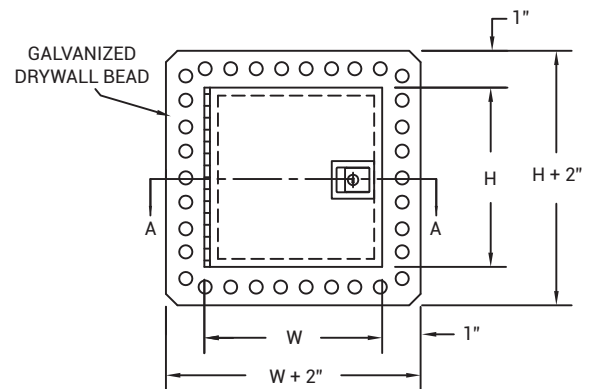

SECTION A-A

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com