



SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTION

The KSTDW is designed for complete concealment in drywall ceilings.

Door panel on the sesame doors will open to a check position for safety and then release for a 90° opening and is removable.

SPECIFICATION

MATERIAL: 20 gauge galvanized steel

LOCK/LATCH: Plastic grommets and be square head key wrench operated

HINGE: Concealed pivot rod

FINISH: Prime coat of rust inhibitive electrostatic powder, baked grey enamel

GASKETING: Flame retardant polyurethane

CONSTRUCTION:

1. Frame shall be 20 gauge galvanized steel.
2. Door shall be 20 gauge galvanized steel and shall be lined with 3/8" mineral fiberboard.
3. Gasketing shall be flame retardant polyurethane.
4. Locks shall have plastic grommets and shall be square head key wrench operated.
5. Hinge shall be concealed pivot with a controlled action device (CAD), except for size 12" x 12".

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **KSTDW**

SESAME DRYWALL CEILING HATCH





DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE W" X H"	SHIP WEIGHT LBS.
12" X 12"	8.2 LBS
18" X 18"	16.7 LBS
24" X 24"	17.6 LBS
24" X 36"	44.4 LBS
24" X 48"	32.6 LBS

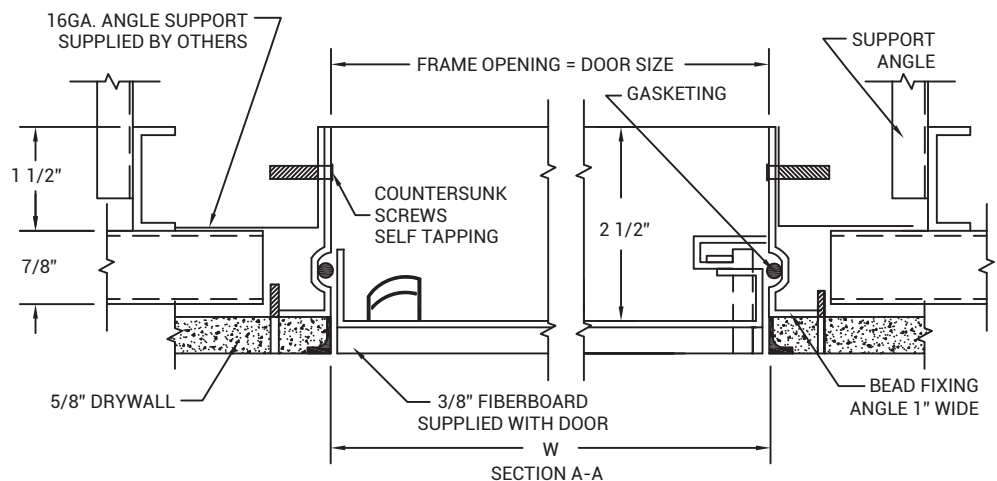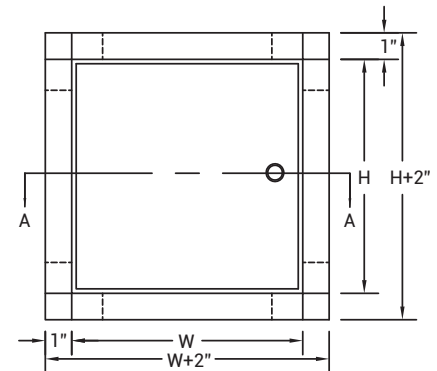

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com