

SUBMITTAL/TECHNICAL DATA SHEET



STANDARD OPTIONS

- MATERIAL:**
16 gauge cold rolled steel
- HINGE:**
Continuous piano hinge
- LOCKING MECHANISM:**
Self-latching tool-key operated slam latch and ring operated slam latch, both included
- FLANGE:**
Galvanized steel, 2 3/4" plaster bead flange
- FRAME:**
2 1/2" in depth, made of 16-gauge cold rolled steel
- INSIDE PANEL RELEASE:**
Mechanisms to allow panels to open from inside, standard on all doors over 12 x 12 inches
- FINISH:**
High quality white powder coat primer
- PACKAGING:**
Individually wrapped, 1 per box

OPTIONS AVAILABLE

- LOCK / LATCH:**
- Key operated cylinder cam latch
 - Handle operated slam latch
 - Mortise preparation for cylinder (cylinder optional)
 - Mortise deadbolt lock
- DESIGN:** Double leaf

For a complete list of options visit www.AccessDoorsAndPanels.com

Scan  or  Click



To view Pricing and Additional Product Info.

LEED READY: THIS PRODUCT CONTRIBUTES TO LEED® CREDITS




SKU: **LHD PLY**

HEAVY DUTY ACCESS DOOR FOR LARGE OPENINGS

WITH PLASTER BEAD FLANGE

INSTALLATION


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

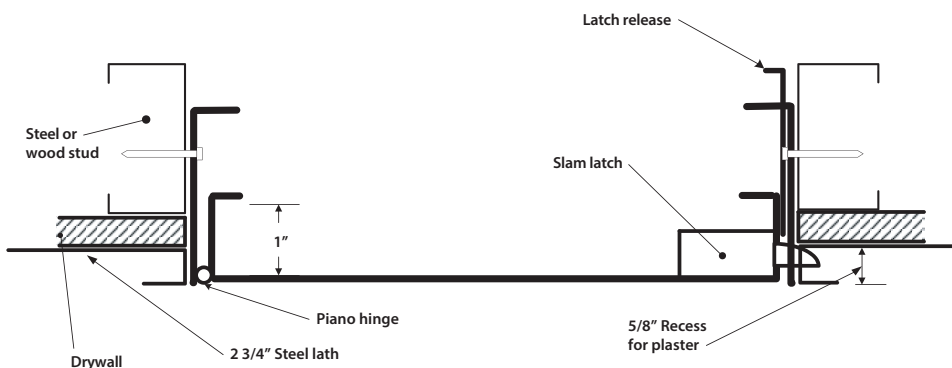

DIMENSIONS AND APPEARANCE

DOOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT	
		LBS	KG
48 x 48 (1219 x 1219)	2	62.8	28.5

ROUGH WALL OPENING = DOOR SIZE + 1/4" OR + 6MM

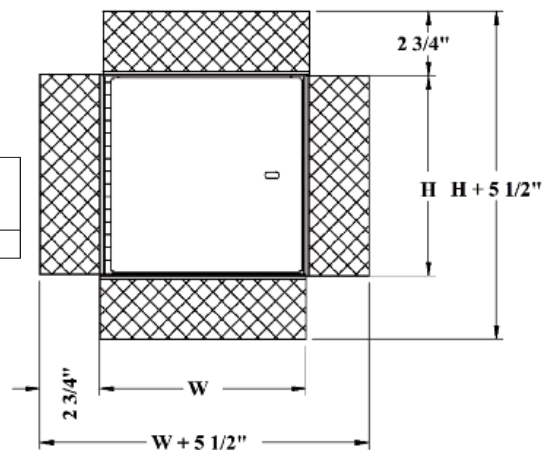

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-888-457-1275

FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com

E-MAIL:
info@AccessDoorsAndPanels.com