



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

MFRU uninsulated fire rated access door is approved by Underwriters Laboratories Inc., for 1 1/2 hours, "B" label in walls. The door meets ANSI-UL 10B standards. It has a unique white finish.

SPECIFICATIONS

MATERIAL:
MFRU Series is 16 gauge satin coat steel door and frame.
The MFRUSS Stainless Steel Series is 16 gage #304 stainless steel door and frame.

DOOR:
Flush to frame. Self-closing. Can be opened from the inside or back of the door with MIFAB's unique thumb turn latch.

FRAME:
Four piece welded frame with masonry mounting straps.

HINGE:
Concealed pivot pins

SPRING:
Heavy duty.

STANDARD LOCK:
Flush mounted, interchangeable turn ring operator and key operator latch.


OPTIONAL LOCK:
Cylinder key lock. All of MIFAB's cylinder key locks are keyed alike.

FIRE RATING:
Underwriters Laboratories "B" label. 1 1/2 hour for walls. Insulation not required.

FINISH: Satin coat steel doors have a primed white finish. Stainless steel doors have a #4 brush satin finish.

PACKAGING: Individual pack

For a complete list of options visit www.AccessDoorsAndPanels.com

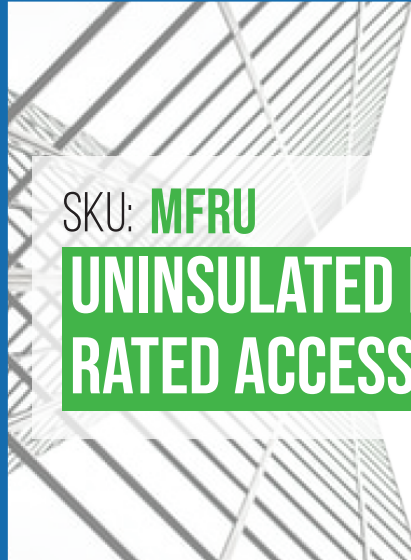


SKU: **MFRU**

UNINSULATED FIRE RATED ACCESS DOOR




DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

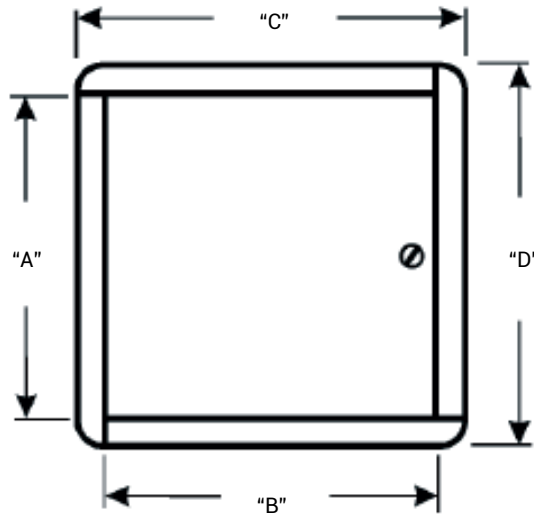

California State Fire Marshall
Approval # 3330-1535:00



Key Operator



Turn Ring Operator

The Key Operator and Turn Ring Operator keys are shipped with every MFRU fire rated access door. If additional keys are required, please order them by Part # KEY-TRO

For detailed specifications see submittal sheet

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



MFRU

UNINSULATED FIRE RATED ACCESS DOOR

"B" X "A"	WALL OPENING	SHIP WEIGHT (Lbs.)	LATCHES	MILD STEEL MODEL #	STAINLESS STEEL MODEL #
8" x 8"	8 1/2" x 8 1/2"	9.0	1	MFRU0808	MFRUSS0808
10" x 10"	10 1/2" x 10 1/2"	10.0	1	MFRU1010	MFRUSS1010
12" x 12"	12 1/2" x 12 1/2"	12.5	1	MFRU1212	MFRUSS1212
12" x 18"	12 1/2" x 18 1/2"	14.5	1	MFRU1218	MFRUSS1218
12" x 24"	12 1/2" x 24 1/2"	17.0	1	MFRU1224	MFRUSS1224
14" x 14"	14 1/2" x 14 1/2"	14.0	1	MFRU1414	MFRUSS1414
16" x 16"	16 1/2" x 16 1/2"	15.0	1	MFRU1616	MFRUSS1616
18" x 18"	18 1/2" x 18 1/2"	19.0	1	MFRU1818	MFRUSS1818
20" x 20"	20 1/2" x 20 1/2"	24.0	1	MFRU2020	MFRUSS2020
22" x 22"	22 1/2" x 22 1/2"	21.5	1	MFRU2222	MFRUSS2222
22" x 30"	22 1/2" x 30 1/2"	31.5	1	MFRU2230	MFRUSS2230
24" x 24"	24 1/2" x 24 1/2"	27.0	1	MFRU2424	MFRUSS2424
24" x 36"	24 1/2" x 36 1/2"	41.5	2	MFRU2436	MFRUSS2436
24" x 48"	24 1/2" x 48 1/2"	58.5	2	MFRU2448	MFRUSS2448
30" x 30"	30 1/2" x 30 1/2"	40.5	2	MFRU3030	MFRUSS3030
32" x 32"	32 1/2" x 32 1/2"	42.5	2	MFRU3232	MFRUSS3232
36" x 36"	36 1/2" x 36 1/2"	54.0	2	MFRU3636	MFRUSS3636
36" x 48"	36 1/2" x 48 1/2"	72.5	2	MFRU3648	MFRUSS3648

- A-B** Door Size
- C-D** Overall Dimensions - Door Size - Plus 2 1/4" (57)
- E-F** Wall opening - Door Size - Plus 1/2" (13)

SUFFIX	OPTIONAL VARIATIONS
■ - C	Cylinder key lock

(Dimension) Denotes Millimetres

Note: The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.

CALIFORNIA PROPOSITION 65 WARNING.

This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.