

Doors are ideally suited for new installations for insulated and uninsulated ducts.

Door and Frame are fabricated from 24 gauge galvanized steel. Door includes a one piece extruded gasket for positive seal with Thermal, Acoustic, and Fire Retardant insulation.

Frame is die-formed and seamless in a sandwich construction. Both flanges of frame are prepunched with 3/16" mounting holes for fastening.

Latches are positive cam lock fastening.

GUIDE SPECIFICATION

Oval Access Door. Access door and frame shall be fabricated from 24 gauge galvanized steel. Door and Frame shall be die-formed and seamless panels in a sandwich construction with one piece extruded gasket for positive seal with Thermal, Acoustic, and Fire Retardant insulation. Door latches are positive cam lock fastening. Frame has pre-punched holes on both flanges for mounting.

SUBMITTAL/TECHNICAL DATA SHEET

SKU: ODD OVAL DUCT DOORS




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

NOMINAL DOOR SIZE	DIM "A"	DIM "B"	DIM "C"	DIM "D"
ODD 8" x 5" (200mm x 125mm)	7-7/8"	5″	9-1/2""	6-1/2"
ODD 12" x 6" (300mm x 150mm)	11-7/8"	6″	13-1/4"	7-7/8"
ODD 18" x 10" (460mm x 260mm)	18-1/4"	10-1/4"	19-5/8"	11-7/8"
ODD 21" x 14" (460mm x 260mm)	21-5/8"	13-3/4"	23-1/4"	15-3/4"
ODD 26" x 18" (460mm x 260mm)	25-5/8"	17-3/4"	27-1/8"	19-5/8"

NOTES: 1. FRAME 2. DOOR 3. POSITIVE CAM LOCK FASTENERS 4. MOUNTING HOLES (2)

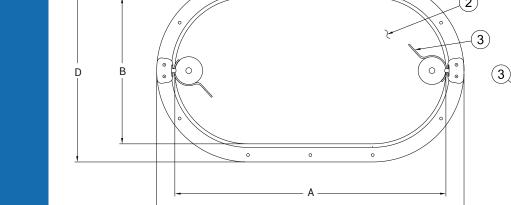

For a complete list of options visit www.AccessDoorsAndPanels.com



To view Pricing and Additional Product Info.

PROJECT DATA

PROJECT NAME :	QTY	w	н	OPTIONS		
ARCHITECT :						
DEALER :						
CONTRACTOR :						
LOCATION :	SPECIAL INSTRUCTIONS :					
DATE :						
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)					
	·					







WEBSITE: www.AccessDoorsAndPanels.com

Custom Sizes Available - Fast!

(1)

E-MAIL: info@AccessDoorsAndPanels.com