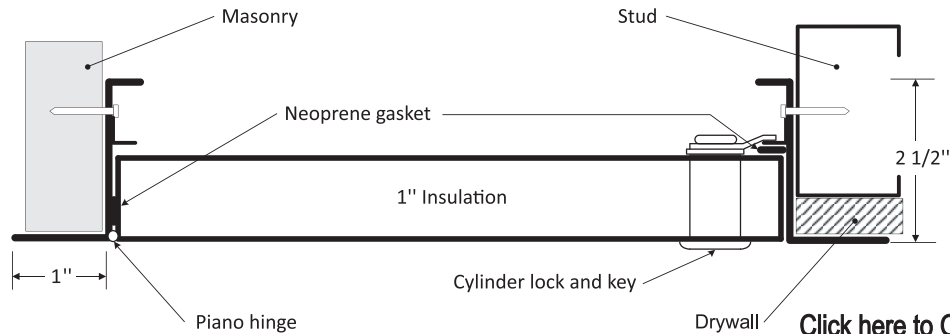
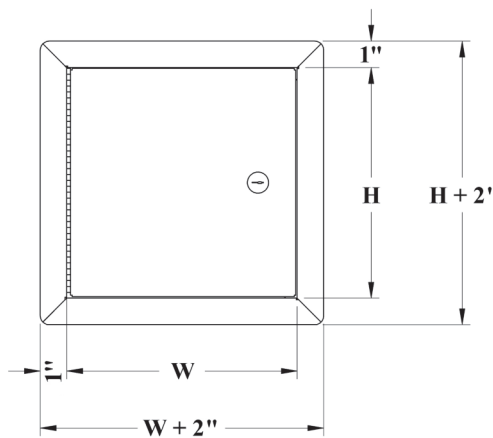


LIGHTWEIGHT INSULATED ALUMINUM ACCESS DOOR
 FOR ALL SURFACE TYPES

PAL
INSTALLATION

[Click here to Online Product Page and Pricing](#)
DIMENSIONS AND APPEARANCE
LEED ready: This product contributes to LEED® credits.

DOOR SIZE - W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS KG	
8 x 8 (203 x 203)	1	2	0.9
12 x 12 (304 x 304)	1	3	1.4
16 x 16 (406 x 406)	1	6	2.7
18 x 18 (457 x 457)	1	7	3.2
24 x 24 (609 x 609)	1	13	5.9
36 x 36 (914 x 914)	2	21	9.5
Rough wall opening is door size + 1/4" or + 6mm			

Your odd sizes:
Made in 5 days


DESCRIPTION AND MATERIAL SPECIFICATION

Material: 0.064" aluminum
Insulation: 1" fiberglass
Hinge: aluminum continuous piano type
Gasketing: neoprene all around perimeter
Lock / latch: cylinder lock and key
Finish: high quality white powder coat primer
Packaging: individually wrapped, 1 per box

POPULAR OPTIONS For complete list of options go to: www.AccessDoorsAndPanels.com

Material: stainless steel 304 #4 (brushed finish)
Lock / latch: screwdriver operated cylinder cam latch, mortise slam latch preparation (cylinder optional), handle operated cam latch


PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:	SUBMITTAL APPROVAL: (signature or stamp)			
TAGGING INSTRUCTIONS:				

Email: info@accessdoorsandpanels.com
Website: www.accessdoorsandpanels.com

Phone: 1-800-609-2917
Fax: 1-888-626-2907

Address:
 P.O. Box 66738 #76520 Saint Louis