




Click here to Online Product Page and Pricing

FIRE RATED UNINSULATED ACCESS DOOR WITH DRYWALL FLANGE

PFN-GyP

INSTALLATION: WALLS ONLY

[3 HOUR WALL APPLICATION]

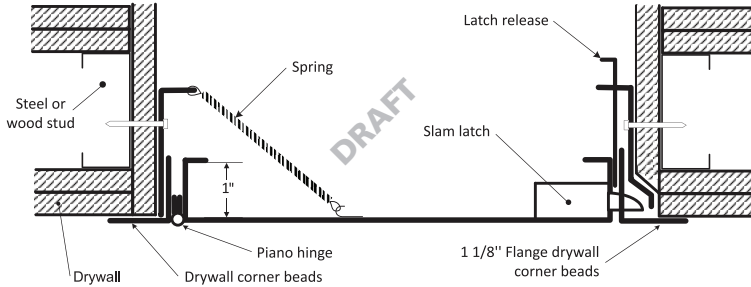


Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.

DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

Your odd sizes: Made in 5 days

DOOR SIZE W x H inches (MM)	NUMBER OF LOCKS	WEIGHT LBS KG
8 x 8 (203 x 203)	1	5 2.3
10 x 10 (254 x 254)	1	7 3.2
12 x 12 (304 x 304)	1	8 3.6
14 x 14 (355 x 355)	1	10 4.5
16 x 16 (406 x 406)	1	12 5.5
18 x 18 (457 x 457)	1	14 6.4
22 x 22 (558 x 558)	1	18 8.2
22 x 30 (558 x 762)	1	22 10
22 x 36 (558 x 914)	2	27 12.2
24 x 24 (609 x 609)	1	22 10
24 x 36 (609 x 914)	2	29 13.2
30 x 30 (762 x 762)	1	30 13.6
32 x 32 (812 x 812)	2	33 15
36 x 36 (914 x 914)	2	39 17.7

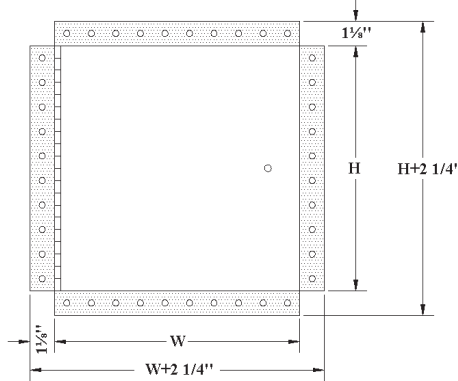

Rough wall opening is door size + 1/4" or + 6mm



DESCRIPTION AND MATERIAL SPECIFICATION

CENDREX PARTNERS

FIRE RATING: 2 hour fire barrier, rating 1½ hours.
Access/Door Frame Assembly (uninsulated) for installation in vertical wall assemblies.

Maximum door size of: 36" x 36".

STANDARDS LISTED: NFPA 252-2003, UI 10b, UI-555, CAN/ULC S112 M90-R2001, CAN/ULC S104-10.
MEA # 507-06-M

Material: 16 gauge cold rolled steel
Hinge: continuous piano hinge
Lock / latch: self latching tool-key operated latch and/or ring operated latch, both included
Inside panel release: standard on all doors over 12" x 12"

GYP: drywall corner beads flange
Automatic panel closer: standard on all doors
Finish: high quality white powder coat primer
Packaging: individually wrapped, 1 per box

POPULAR OPTIONS For complete list of options go to: www.AccessDoorsAndPanels.com

Material: stainless steel #4 (brushed finish),
Lock / latch: key operated cylinder cam latch, handle operated slam latch, mortise preparation for cylinder (cylinder optional), hex head slam latch, mortise deadbolt lock
Masonry anchor: available on all sizes



PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEAIER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

Email: info@accessdoorsandpanels.com
Website: www.accessdoorsandpanels.com

Phone: 1-800-609-2917
Fax: 1-888-626-2907

Address:
P.O Box 66738 #76520 Saint Louis