



High-quality, architecturally pleasing, innovative access doors for walls, ceilings, ducts, floors and roofs



FLUSH for Plaster Walls & Ceilings PS-5030

Application

- Installation in plaster walls and ceilings, before the plaster is applied
- Economical and attractive access door for walls & ceilings

Product Features

- An expansion casing bead with 3" wide galvanized lath
- Concealed continuous hinge

PS-5030 Access Door Specifications:

Door / Door Frame: Steel: 14 gage door, 14 gage mounting frame
Formed door panel, flanged on four sides, flush to edge of frame
expansion casing bead with 3" wide galvanized lath, recessed 3/4" to receive plaster

Hinge: Continuous, concealed

Standard Latch: Stainless steel slot screwdriver operated cam latch

Optional Latches/Locks: Cylinder lock & key, allen head cam latch, spanner head cam latch, torx


Finish: Steel: 5 stage iron phosphate preparation with prime coat of White alkyd baking-on enamel



AVAILABLE SIZES (Special sizes available upon request)

NOMINAL DOOR SIZE W X H		WEIGHT PER DOOR		
inches	mm	Latches	lbs.	kg.
6 X 6	152 X 152	1	3	1.4
8 X 8	203 X 203	1	3.5	1.5
10 X 10	254 X 254	1	4.5	2
12 X 12	305 X 305	1	6	2.7
14 X 14	355 X 355	1	7.5	3.3
16 X 16	406 X 406	2	9.5	4.2
18 X 18	457 X 457	2	11.5	5.1
22 X 22	560 X 560	4	15	6.7
24 X 24	610 X 610	4	19	8.4
24 X 36	610 X 914	5	28	12.4
30 X 30	762 X 762	5	27.5	12.5
36 X 36	914 X 914	5	39	17.7

Wall or ceiling opening is W + 3/8" (9 mm)
For detailed specifications see submittal sheet

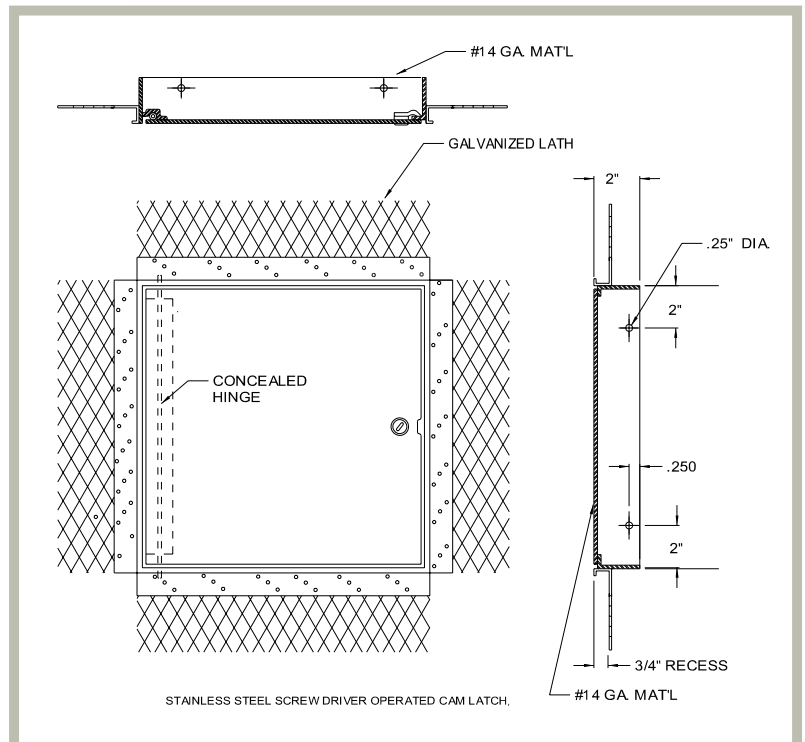

[Click here to Online Product Page and Pricing](#)

For more information, contact AccessDoorsAndPanels www.AccessDoorsAndPanels.com

Phone: 1-800-609-2917

Fax: 1-888-626-2907

Email: info@accessdoorsandpanels.com