

## DETAIL & SUBMITTAL SHEET



WALLS & CEILINGS

### SPECIFICATIONS:

**Door:** 16 ga. steel, 5/8" recessed depth to accommodate drywall

**Frame:** 16 ga. steel. These models have a 1" wide perforated flange of 24 ga. galvanized steel for mounting purposes.

**Hinge:** Concealed pivot rod

**Latches:** Flush, stainless steel cam latch

**Finish:** Grey baked enamel coat

### OPTIONS [at additional cost]

#### Finishes:


- Stainless Steel Type 304 No. 4 Satin Finish Brushed
- Stainless Steel Type 316 No. 4 Satin Finish Brushed

#### Options: [additional cost]


- Key operated medium barrel cylinder lock (1-1/8" Windlock, keycode C415A) or WB 151 keycode
- 5/8" Type X Gypsum Board installed [RDW 410 - 2]
- Weather resistive neoprene gasketing all 3 sides [Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized]
- Special sizes available
- 

✓	Item No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
	RDW 410	12 x 12	12 1/4 x 12 1/4	3	6
	RDW 410	16 x 16	16 1/4 x 16 1/4	3	12
	RDW 410	18 x 18	18 1/4 x 18 1/4	3	14
	RDW 410	24 x 24	24 1/4 x 24 1/4	4	21
	RDW 410	24 x 36	24 1/4 x 36 1/4	4	21

### FRONT ELEVATION

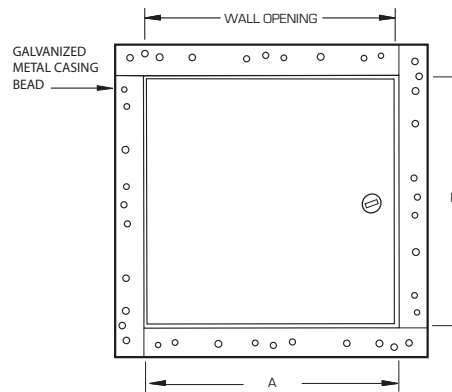

### SECTION DETAIL

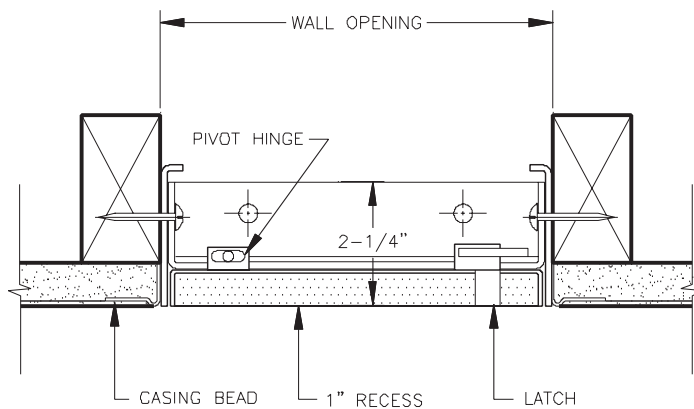

Our recessed drywall door gives the option of installing a matching piece of drywall into the door panel thus keeping the continuity of the visual area.

[Click here to Online Product Page and Pricing](#)

## AccessDoorsAndPanels

**Phone:** 1-800-609-2917 **Email:** [info@accessdoorsandpanels.com](mailto:info@accessdoorsandpanels.com)  
**Website:** [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
**Fax:** 1-888-626-2907 **PO Box 66738 #76520, Saint Louis, MO 63166 6738**



[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)