



SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

The face of the door on the RDWPD contains a factory installed 5/8" drywall to match the texture of the surrounding drywall. The door frame shall include a drywall bead so that drywall cement can be applied to conceal the flange. The RDWPD is the perfect solution when concealing the access door is required for aesthetic purposes. The RDWPD also reduces installation time and costs.

SKU: **RDWPD S**

RECESSED ACCESS DOOR

WITH FACTORY INSTALLED DRYWALL



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

SPECIFICATIONS

CONSTRUCTION:

- Frame shall be 16 gauge steel and doors shall be 16 gauge steel.

- Door shall be recessed 5/8" with factory install 5/8" drywall.

- Trim shall be galvanized steel dry wall bead.



- Hinge shall be concealed rod for pivoting door.

- Locks shall be flush and screwdriver operated with cam and studs, or shall be key operated cylinder lock with automatic dust shutter.

- Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel.

STANDARD SIZES:

DOOR SIZE W X H (IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF STUD LATCHES	SHIP WT. (LBS.)
12 x 12	12 1/8 x 12 1/8	1	8.0
18 x 18	18 1/8 x 18 1/8	2	15.0
12 x 24	12 1/8 x 24 1/8	2	14.5
24 x 24	24 1/8 x 24 1/8	4	24.5
24 x 36	24 1/8 x 36 1/8	5	36.5

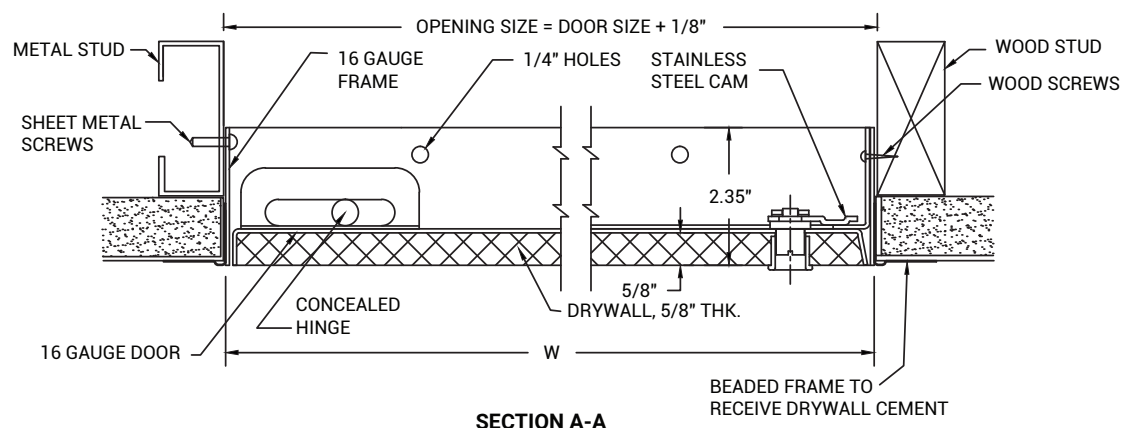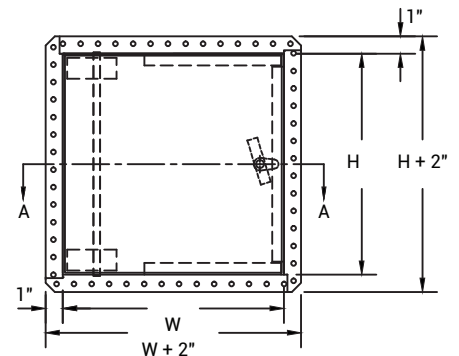

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com