



JL INDUSTRIES

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

Allow More Light Into Your Facility with our Insulated, Domed Roof Hatch. The RHGD is Available in all of the Standard Sizes and the Durable Construction You have Come to Trust.

SPECIFICATIONS

CONSTRUCTION: 14 gauge galvanized steel 12" high curb and 3-5/8" wide flange for securing to roof deck. The cover includes a 14 gauge steel exterior and 22 gauge liner with an EPDM perimeter gasket. The dome retainer is extruded aluminum fitted over a welded steel flange - for weathertight construction. Hinged on the "width" side.

INSULATION: 1" rigid fiberboard insulation on curb, 1" mineral wool between the exterior cover and liner on solid roof area.

ACRYLIC DOME: Dome is white translucent acrylic.

HARDWARE: Heavy duty zinc-coated hinge and pin. Fastening hardware is zinc-coated.

HARDWARE: Heavy-duty zinc-plated hinge and pin.

LINKAGE: Heavy gauge automatic hold open arm with red vinyl grip for opening and closing.

CLOSURE: Compression operated, shock absorbing cylinder.

LATCH: Exterior handle, inside locking handle with interior and exterior padlock hasp.

FINISH: Gray hammertone powder coat.

SIZES:

Minimum size 30" x 30",
Maximum size 48" x 96".

Contact customer service for other sizes.

For a complete list of options visit www.AccessDoorsAndPanels.com



SKU: **RHGD**

GALVANIZED STEEL ROOF HATCH




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


STANDARD SIZES:

MODEL	W x L	DOME FRAME
RHGD-1	30" x 36"	20" X 20"
RHGD-2	54" x 30"	20" X 40"
RHGD-3	96" x 30"	20" X 40"
RHGD-4	36" x 36"	20" X 20"
RHGD-5	48" x 48"	20" X 20"

Custom sizes available.

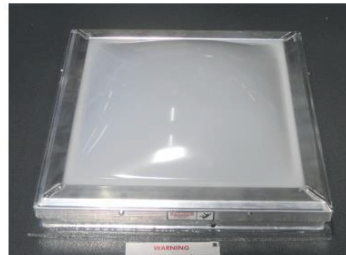

Detail of Dome Construction

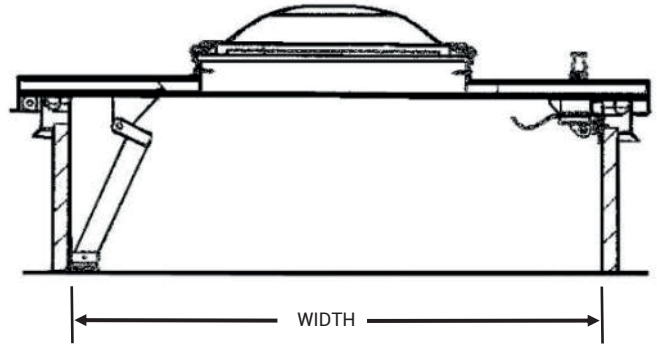

CERTIFICATIONS: ASTM certified under specifications A792/A792M-06a, A653/A653M-06a, C726-05 and A36/A36M-05. Tested and approved to support a minimum live load of 40 lbs/sq of with a maximum deflection of 1/150th of the span, maximum negative load of 50 lbs/sq ft wind uplift and 110 mph wind load when cover is an open position.

OPTIONS AT ADDITIONAL COST:

- Wood Nailer instead of fiberboard curb insulation
- LP-4 _ LP-5 _ LP6, Ladder Posts (see separate submittals for more information)
- Saf-T-Hatch Rooftop Safety Railing - (see separate submittal for more information)
- Stainless Steel Hardware: Hinges, exterior handle, inside locking handle

PROJECT DATA

Custom Sizes Available - Fast!

Scan or



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-888-457-1275

FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com

E-MAIL:
info@AccessDoorsAndPanels.com