

SUBMITTAL/TECHNICAL DATA SHEET

FEATURES

- Meets or exceeds OSHA 29 CFR 1910.29
- Non-penetrating attachments; quick and simple installation with standard tools
- · Corrosion-resistant aluminum rails & mounting brackets, along with stainless steel hardware, are ideal for any climate
- "Safety yellow" powder coat paint finish
- · Self-closing and locking gate
- Fits all brands of roof hatches with capflashing
- · Available in a variety of sizes

SPECIFICATIONS

Posts and rails are 1¼" schedule 40 pipe in 6061 T6 aluminum alloy. Curb mounting brackets and teardrop brackets are 6063 T5 aluminum extrusion. Lock assembly is cast aluminum and gate spring hinges and all fasteners are type 316 stainless steel. Hatch rail system satisfies the by requirements of OSHA 29 CFR 1910.29 and meets OSHA strength requirements. Finish shall be safety yellow powder coat paint finish. Manufacturer shall provide a 5-year warranty against defects in material and workmanship.

ROOF SCUTTLE NOT INCLUDED

For a complete list of options visit www.AccessDoorsAndPanels.com


```
SIZE (INCHES)
QTY TYPE
                    X
CUSTOMER FIELD DIMENSIONS
```

SKU: RL2-S **RAIL SYSTEM HATCH** FOR EXISTING ROOF HATCHES



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

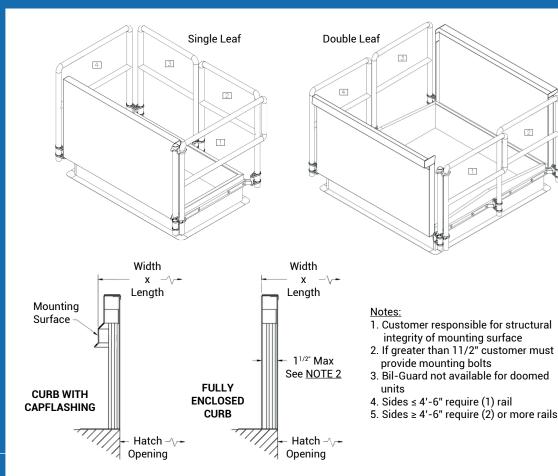

PROJECT DATA


FAX:

1-888-626-2907

Custom Sizes Available - Fast!



To view Pricing and Additional Product Info.

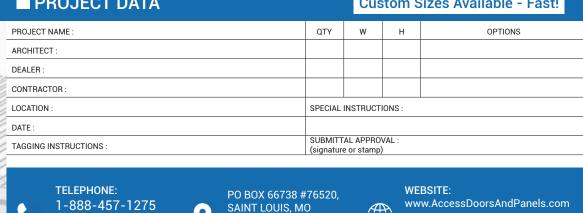

63166-6738

USA

F-MAIL .

info@AccessDoorsAndPanels.com