



JL INDUSTRIES

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

Double door smoke vents automatically open during a fire with a heat responsive device, releasing harmful smoke and fumes. Smoke vents are referenced in International Building Code Section 410 for stages, platforms and technical production areas and Section 910 for smoke and heat removal in storage and warehouse occupancies.

SPECIFICATIONS

MATERIAL: Curb is 14 gauge galvanized steel and cover is 11 gauge aluminum extrusion with 24 gauge galvanized steel liner.

FINISH: Silver prime double coat.

GASKETING: Continuous gasket door seal.

INSULATION: 1" rigid fiberboard in curb and 1" fiberglass in covers.

HINGES: Heavy-duty hinges.

OPERATION: Torsion springs automatically open covers when 165°F fusible link melts or with exterior pull handle and shock absorbers control the speed of opening.

CERTIFICATIONS: UL 793 listed and labeled up to maximum 48" x 96".

PERFORMANCE: Covers shall open against 10 psf snow/wind load. Vent assembly rated for 40 psf live load. Covers remain closed under 30 psf wind uplift force.

SIZES:
Minimum: 48" x 48"
Maximum: 60" x 96"

(Sizes over 48" x 96" are not UL listed)




DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:


MODEL	PREVIOUS MODEL		CURB OPENING L X W
	JL	DUR-RED	
RVFGA-4848PSI	UFV-1	UFV-1	48" x 48"
RVFGA-4872PSI	UFV-2	UFV-2	48" x 72"
RVFGA-4890PSI	UFV-3	UFV-3	48" x 90"
RVFGA-4896PSI	UFV-4	UFV-4	48" x 96"
RVFGA-6060PSI	UFV-5	UFV-5	60" x 60" (not UL listed)
RVFGA-6096PSI	UFV-6	UFV-6	60" x 96" (not UL listed)

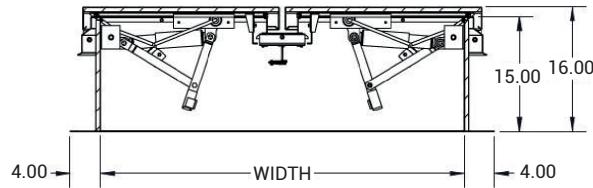

SINGLE WALL CURB-STANDARD

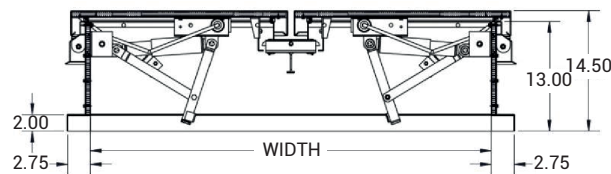

CURB-MOUNT OPTION WITH DOUBLE WALL CURB

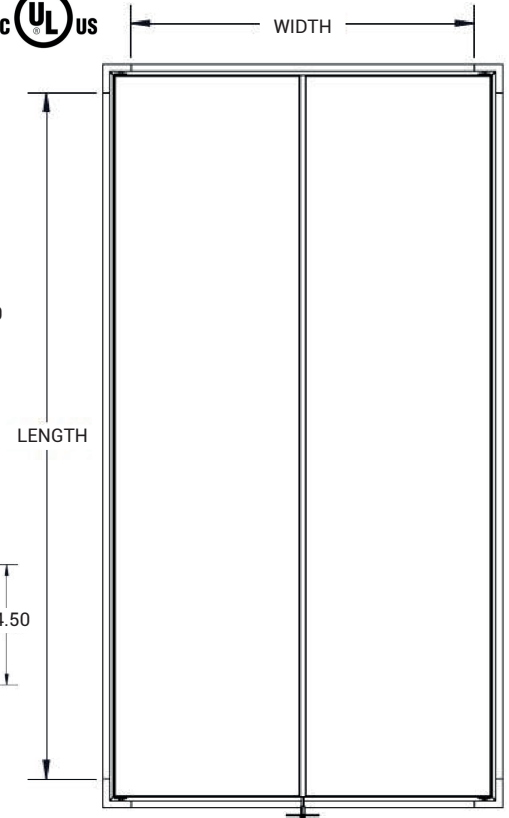

For a complete list of options visit www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com