

SUBMITTAL/TECHNICAL DATA SHEET



DESCRIPTIONS


Keeps window well area clean of snow, leaves and debris. Constructed of polycarbonate, this high-impact cover is UV-resistant and designed for durability and long-life. Sizes are available for all standard size window wells.

FEATURES

- Clear polycarbonate construction
- Designed to withstand a minimum 200 lb live load
- Protects window well area from dirt, debris and animals
- Condensation resistant design
- Available for both StakWEL and ScapeWEL models

IMPORTANT

When using a dome cover with a casement window, the window well must be installed so that it is higher than the top of the window so that the cover will not interfere with the window operation.

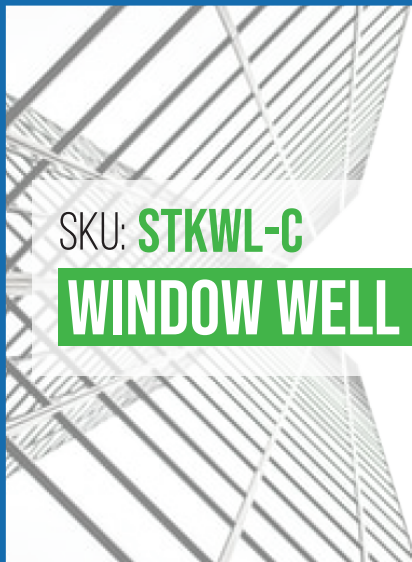

SKU: **STKWL-C**

WINDOW WELL COVERS



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

Selecting The Proper Size:

Step 1

Measure or calculate dimension **(A)** as shown in the detail on the right based on the site's grade conditions and foundation height.

Step 2:

Determine the required window well side panel height by performing this simple calculation:

Required Side Panel Height = Dimension **(A)** + 7 1/2" From the table below, select the closest height that will meet the site conditions.


Step 3:

Once the side panel height has been determined, read across and select the desired window width. With the window size selected, read across to select the proper window well and cover.

NOTE: Both StakWEL® and ScapeWEL® models satisfy building code requirements for emergency egress.

Window Well Dome Cover Option

Limits the accumulation of snow, leaves and debris. Constructed of polycarbonate, this high impact cover is UV-resistant and designed for durability and long life.

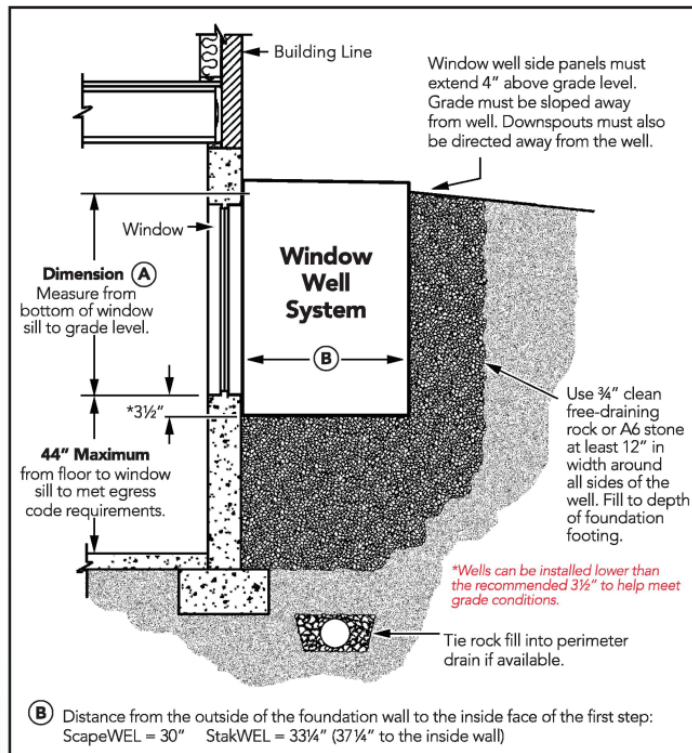

CALL FOR ASSISTANCE ON CHOOSING THE SIZES.

NOTE: For applications with a casement window, the well must be installed so that it is above the top of the window for a dome cover to be utilized.

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-888-457-1275

FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com

E-MAIL:
info@AccessDoorsAndPanels.com



SUBMITTAL



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com

STKWL-C

WINDOW WELL COVERS

STANDARD SIZES AND MODEL NUMBERS:

ScapeWEL® Window Well System									
Model No.	No. of Tiers (steps)	Inside Width	Projection from Foundation	Side Panel Height			Maximum Window Width		Optional Dome Cover
				Standard	With Extension*		Wall Mount	Buck Mount	
					Height	Model No.			
4048-42	2	42"	41"	48"	X	X	42"	38"	4042C
4048-54	2	54"	41"	48"	X	X	54"	50"	4054C
4048-66	2	66"	41"	48"	X	X	66"	62"	4066C
4862-42	3	42"	49"	62"	81"	3019-42	42"	38"	4842C
4862-54	3	54"	49"	62"	81"	3019-54	54"	50"	4854C
4862-66	3	66"	49"	62"	81"	3019-66	66"	62"	4866C

X - Not Available.

*Extensions are only available for 3-tier window well models. Note: The distance from the outside of the foundation wall to the inside face of the first step is 30".

StakWEL® Modular Window Well System					
Model No.	Height Based on No. of Modules	Inside Width	Keyhole Centers	Projection from Foundation	Optional Dome Cover
stkwl	(1) = 21"	54"	58"	40¼"	stkwl-c
stkwl	(2) = 36¾"	54"	58"	40¼"	stkwl-c
stkwl	(3) = 51¾"	54"	58"	40¼"	stkwl-c
stkwl	(4) = 67⅛"	54"	58"	40¼"	stkwl-c
stkwl	(5) = 82½"	54"	58"	40¼"	stkwl-c
stkwl	(6) = 97⅞"	54"	58"	40¼"	stkwl-c

NOTE: StakWEL Window Wells cannot be used with 60" wide windows. Use ScapeWEL model for this window size.