



VIEW A  
ENLARGED SECTION OF  
NEOPRENE CUSHION  
& TILE EDGING

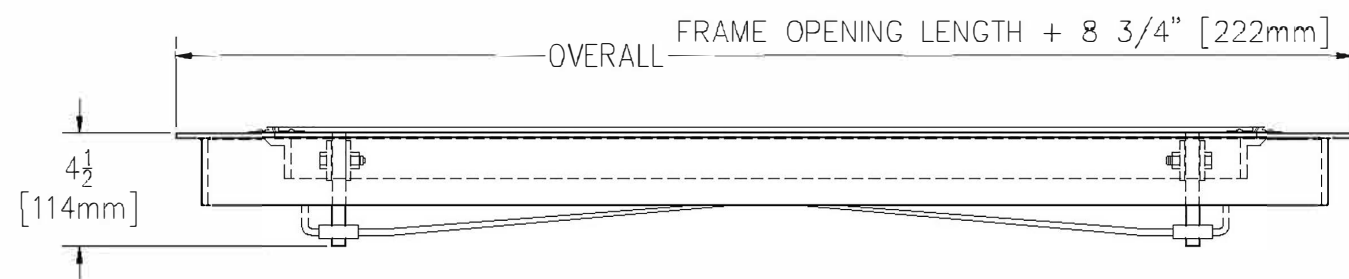

Frame areas that come in contact with concrete shall be coated with bituminous paint

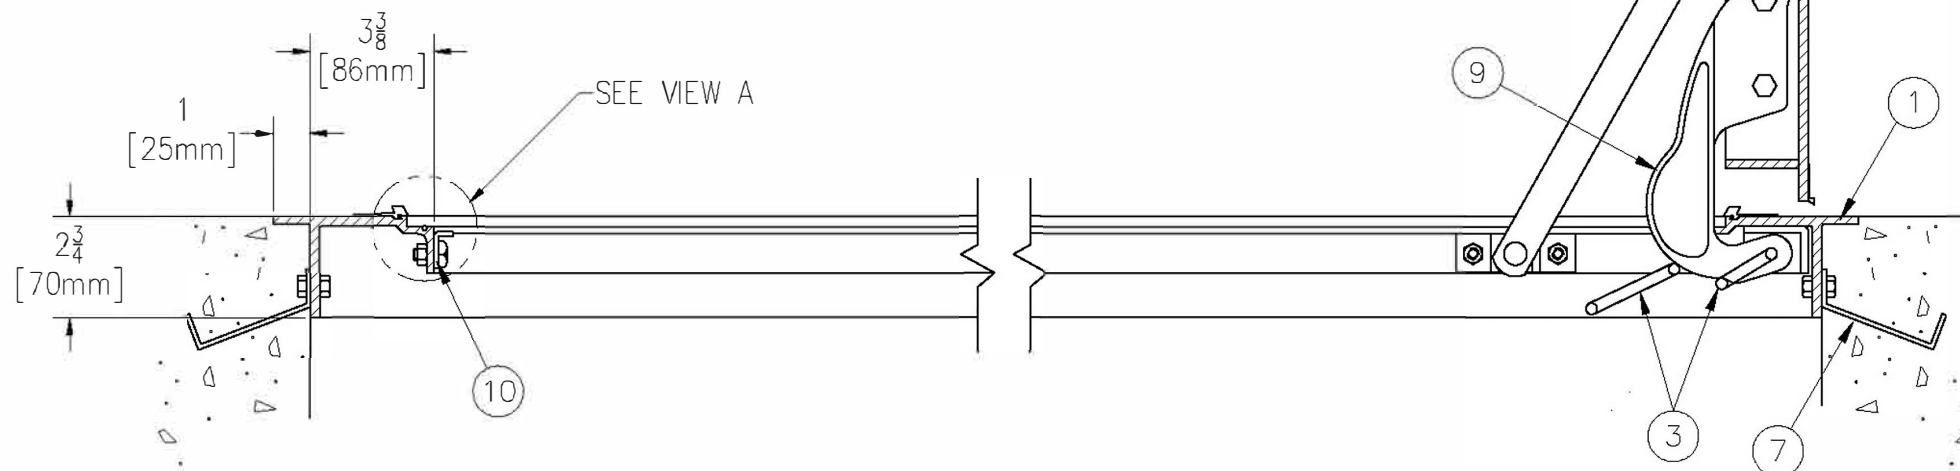

**SPECIFICATIONS**

1. Extruded aluminum frame
2. 1/4" aluminum smooth plate cover
3. Torsion/cam operating mechanism
4. Standard slam lock
5. Removable square key wrench
6. Bilco automatic hold open arm w/ red vinyl grip
7. 1/8" x 1" steel anchor strap
8. Continuous neoprene cushion
9. Steel cast hinges
10. Lock strike
11. Guide arm (if req'd)
12. Aluminum tile edging around frame and cover

SHOP FINISH:  
ALUMINUM: MILL FINISH  
HARDWARE: ZINC PLATED & CHROMATE SEALED  
(unless otherwise specified)

REINFORCED FOR 150 Lbs. PER Sq. Ft.  
(732 kg. PER Sq. METER) LIVE LOAD

**INSTALLER NOTES:**

- A. Use caution. Cover is spring loaded. Do not remove safety shipping bolt until unit is to be installed and in normal horizontal operating position.
- B. Before anchoring in place open and close door. Check to see that the door in the closed position rests on the frame all around. If not, shim under the frame at the proper corner.

*Customer:*

*P.O. N°*

*Job:*

*Sales Rep:*

**SINGLE LEAF ACCESS DOOR  
TYPE T - INTERIOR  
SIZE**

QTY	TYPE	WIDTH x LENGTH
<input type="checkbox"/>	T-1	2'-0" x 2'-0" [610mm] x [610mm]
<input type="checkbox"/>	T-2	2'-6" x 2'-6" [762mm] x [762mm]
<input type="checkbox"/>	T-3	3'-0" x 2'-6" [914mm] x [762mm]
<input type="checkbox"/>	T-4	3'-0" x 3'-0" [914mm] x [914mm]
<input type="checkbox"/>	T-5	3'-6" x 3'-6" [1065mm] x [1065mm]

TILE SIZE:  1/8"  3/16"