



SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTION

Provides a full range of standard options in steel, galvanized steel or stainless steel for non fire-rated wall and ceiling applications. We offer four flange options – standard 1" flange, wallboard bead flange to be taped and mudded, a plaster flange, or extended plaster flange. Our sturdy construction with a concealed hinge provides a cost-effective, yet attractive access solution for any building.

SPECIFICATIONS

FRAME AND DOOR MATERIAL: Cold rolled steel, galvanized or stainless

STANDARD FINISH: Powder coat white or 304 stainless steel with #4 finish (TMS).

HINGE: Concealed hinge.

LATCH: Flush screwdriver-operated cam standard.

LATCH OPTIONS: Cylinder lock, knurled knob, Torx head cam, spanner head cam, hex head cam, mortise lock prep or mortise lock installed.

FLANGE: Standard exposed (TM), drywall (TMW), plaster (TMP) or extended plaster (TME).

OTHER OPTIONS: Double door, removable door, gasketing, view window.

SKU: **TM**


MULTI-PURPOSE ACCESS PANEL

WITH 1" TRIM FOR WALLS & CEILINGS




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

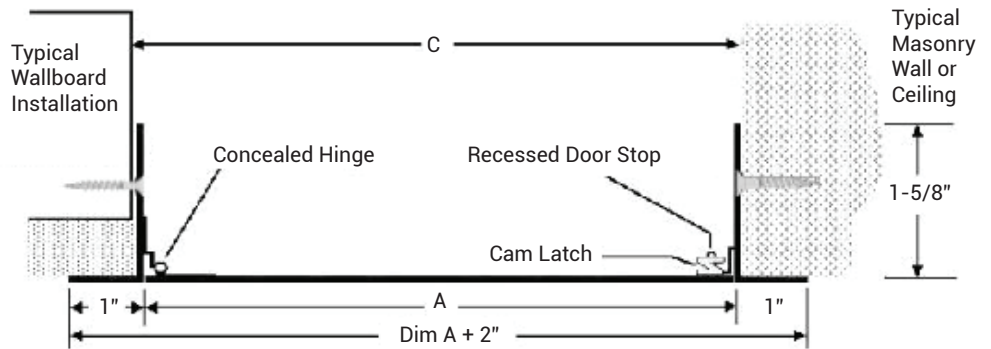

LATCH AND LOCK OPTIONS

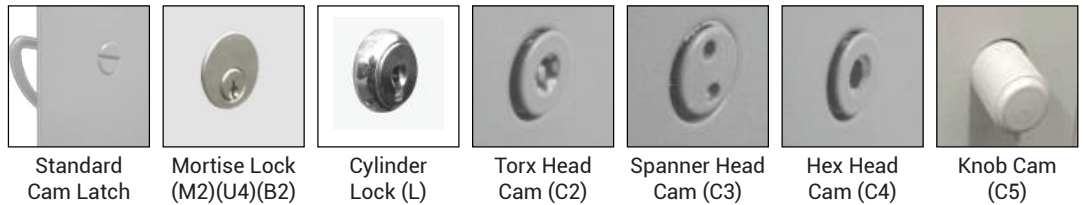

Standard Color is White, Optional Colors at Additional Cost



For detailed specifications see submittal sheet

For a complete list of options visit www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA




WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



TM

MULTI-PURPOSE ACCESS PANEL WITH 1" TRIM FOR WALLS & CEILINGS

A-Model Size = Door Size Width x Height	B-Outside Frame Dimensions 1" Trim Flange		C-Wall Opening Dimensions Fits ± 1/8" Opening Size		Approx. Ship Wt. (lbs)	Latches
	Width	Height	Width	Height		
6" x 6"	8"	8"	6 1/2"	6 1/2"	4	1
8" x 8"	10"	10"	8 1/2"	8 1/2"	4	1
8" x 12"	10"	14"	8 1/2"	12 1/2"	6	1
10" x 10"	12"	12"	10 1/2"	10 1/2"	6	1
12" x 12"	14"	14"	12 1/2"	12 1/2"	7	1
12" x 16"	14"	18"	12 1/2"	16 1/2"	9	1
12" x 18"	14"	20"	12 1/2"	18 1/2"	10	1
12" x 24"	14"	26"	12 1/2"	24 1/2"	12	2
14" x 14"	16"	16"	14 1/2"	14 1/2"	9	1
16" x 16"	18"	18"	16 1/2"	16 1/2"	11	1
16" x 20"	18"	22"	16 1/2"	20 1/2"	13	2
18" x 18"	20"	20"	18 1/2"	18 1/2"	20	3
20" x 24"	22"	26"	20 1/2"	24 1/2"	15	4
20" x 30"	22"	32"	20 1/2"	30 1/2"	20	4
22" x 22"	24"	24"	22 1/2"	22 1/2"	17	4
22" x 30"	24"	32"	22 1/2"	30 1/2"	22	4
22" x 36"	24"	38"	22 1/2"	36 1/2"	24	5
24" x 24"	26"	26"	24 1/2"	24 1/2"	18	4
24" x 30"	26"	32"	24 1/2"	30 1/2"	22	5
24" x 36"	26"	38"	24 1/2"	36 1/2"	25	5
30" x 30"	32"	32"	30 1/2"	30 1/2"	30	5
36" x 36"	38"	38"	36 1/2"	36 1/2"	41	5
36" x 48"	38"	50"	36 1/2"	48 1/2"	51	6

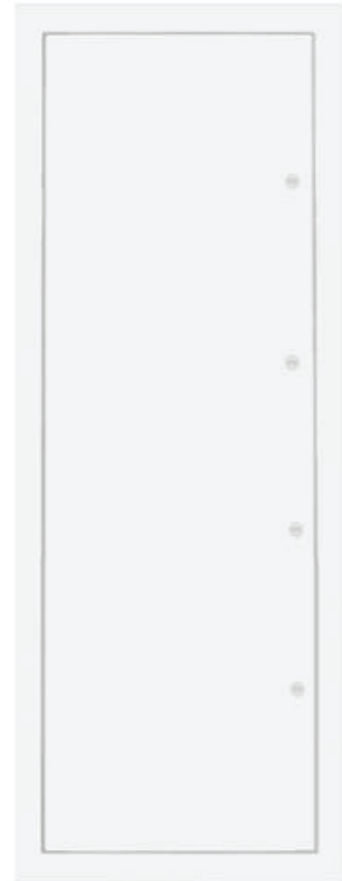

Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above
For Example 16-1/4", 16-1/2" or 16-3/4"
Minimum Size 6" x 6", Max Size 48" x 48"

NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:

- Cold Rolled Steel 14 gauge door with 16 gauge frame
- Cold Rolled Steel 16 gauge door with 14 gauge frame
- Cold Rolled Steel 14 gauge door with 14 gauge frame

OPTIONS AT ADDITIONAL COST:

- Plexiglass View Window
- Rain Hood
- Gasketing
- Removable Door with no hinges
- Optional Color Code:
- (L) Cylinder lock installed
- (M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length
- #0646 Brass Retaining Ring for M1 -may be required for locks by others
- Other 1-1/8" dia. mortise cylinder by request:
- (M2) Mortise cam lock (06431) installed
- (U3) Mortise slam lock prep
- (U4) Mortise slam lock (06431) installed
- (B1) Mortise deadbolt prep
- (B2) Mortise deadbolt lock (06441) installed
- (C5) Knob cam
- (C2) Torx head cam
- (C4) Hex head cam
- (C3) Spanner head cam