

# SUBMITTAL: MODEL TMS™ STAINLESS STEEL FLUSH ACCESS PANELS

Model TMS for Masonry, Tile and Wallboard is an all purpose 16 gauge stainless steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. Use the TMS for hospital and restaurant applications. The 1" frame flange adds rigidity and conceals the rough wall openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing and results in a door always closing square in place.

## SPECIFICATIONS

**Frame:** 18 gauge, stainless steel with 1" wall flange. 1-5/8" depth.

**Door:** 16 gauge, stainless steel mounted with 90° continuous, concealed stainless steel hinge.

**Finish:** 304 stainless, #4 Satin finish.

**Lock:** Flush screwdriver-operated steel cam - C.

**Sizes:** Minimum 6" x 6", maximum 48" x 48"

### STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:

\_\_\_\_\_ For sizes not shown on chart. \_\_\_\_\_" W x \_\_\_\_\_" H (See sizes above)

### STEP 2: NON-STANDARD FRAME & GAUGE OPTIONS FOR ADDITIONAL COST:

\_\_\_\_\_ 14 gauge door      \_\_\_\_\_ 14 gauge frame

\_\_\_\_\_ 16 gauge door      \_\_\_\_\_ 16 gauge frame


\_\_\_\_\_ 18 gauge frame

### STEP 3: SELECT OPTIONS AT ADDITIONAL COST

<input type="checkbox"/> Plexiglass view window	<input type="checkbox"/> (U4) Mortise slam lock (06431) installed
<input type="checkbox"/> Rain Hood	<input type="checkbox"/> (B1) Mortise deadbolt prep
<input type="checkbox"/> Gasketing	<input type="checkbox"/> (B2) Mortise deadbolt lock (06431) installed
<input type="checkbox"/> Removable Door (no hinges)	<input type="checkbox"/> (C5) Knob cam <a href="#">View Lock Options Online</a>
<input type="checkbox"/> (L) Cylinder lock installed	<input type="checkbox"/> (C2) Torx head cam
<input type="checkbox"/> (M1) Mortise cam lock prep: 1-1/8" Ø, 1-1/4" length	<input type="checkbox"/> (C4) Hex head cam
<input type="checkbox"/> (M2) Mortise cam lock (06431) installed	<input type="checkbox"/> (C3) Spanner head cam
<input type="checkbox"/> (U3) Mortise slam lock prep	<input type="checkbox"/> Other 1-1/8" dia. mortise cylinder by request: _____
<input type="checkbox"/> #0646 Brass Retaining Ring for M1 (may be required for locks by others)	<input type="checkbox"/> Double door - see separate submittal to order
	<input type="checkbox"/> Stainless 316 Finish



Standard Cam Latch

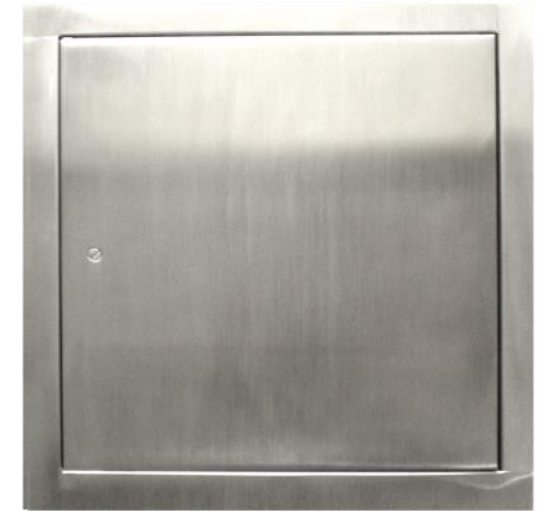

Order Format Example: TMS-2424C

TMS - \_\_\_\_\_  
Width   Height   Lock   Special  
(C Std or   Finish  
Option Code)

Please Note - Lock Option Codes have Changed.

### LATCH AND LOCK OPTIONS

Mortise Lock (M2) (U4) (B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)



Distributor:	Quantity:
Contractor:	Approved By:
Model #:	Architect:
Project:	Date:

Qty	A-Model Size = Door Size	B-Outside Frame Dimensions 1" Trim Flange		C-Wall Opening Dimensions Fits ± 1/8" Opening Size		Approx. Ship Wt. (lbs)	Latch(es)
	Width X Ht	Width	Height	Width	Height		
	<b>6" x 6"</b>	8"	8"	6 1/2"	6 1/2"	4	1
	<b>8" x 8"</b>	10"	10"	8 1/2"	8 1/2"	4	1
	8" x 12"	10"	14"	8 1/2"	12 1/2"	6	1
	<b>10" x 10"</b>	12"	12"	10 1/2"	10 1/2"	6	1
	<b>12" x 12"</b>	14"	14"	12 1/2"	12 1/2"	7	1
	12" x 16"	14"	18"	12 1/2"	16 1/2"	9	1
	12" x 18"	14"	20"	12 1/2"	18 1/2"	10	1
	12" x 24"	14"	26"	12 1/2"	24 1/2"	12	2
	14" x 14"	16"	16"	14 1/2"	14 1/2"	9	1
	<b>16" x 16"</b>	18"	18"	16 1/2"	16 1/2"	11	1
	16" x 20"	18"	22"	16 1/2"	20 1/2"	13	2
	<b>18" x 18"</b>	20"	20"	18 1/2"	18 1/2"	20	3
	20" x 24"	22"	26"	20 1/2"	24 1/2"	15	4
	20" x 30"	22"	32"	20 1/2"	30 1/2"	20	4
	22" x 22"	24"	24"	22 1/2"	22 1/2"	17	4
	22" x 30"	24"	32"	22 1/2"	30 1/2"	22	4
	22" x 36"	24"	38"	22 1/2"	36 1/2"	24	5
	<b>24" x 24"</b>	26"	26"	24 1/2"	24 1/2"	18	4
	24" x 30"	26"	32"	24 1/2"	30 1/2"	22	5
	24" x 36"	26"	38"	24 1/2"	36 1/2"	25	5
	30" x 30"	32"	32"	30 1/2"	30 1/2"	30	5
	36" x 36"	38"	38"	36 1/2"	36 1/2"	41	5
	36" x 48"	38"	50"	36 1/2"	48 1/2"	51	6
<p><b>Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above</b>  <b>For Example 16-1/4", 16-1/2" or 16-3/4"</b>  <b>Minimum Size 6" x 6", Max Size 48" x 48"</b></p>							

