

STANDARD OPTIONS

- COVER:**
14 gauge galvanized steel with 1" fiberglass insulation
- CURB:**
14 gauge galvanized steel with 1" fiber board insulation
- SEAL:**
"D" - foam adhesive gasket provides a flush and tight fit
- FINISH:**
High quality white powder coat primer
- COMPONENTS:**
- 2 gas cylinders
 - Retaining bar handles

OPTIONS AVAILABLE

MATERIAL:
Aluminum


For a complete list of options visit
www.AccessDoorsAndPanels.com



SKU: **TRH**
ROOF HATCH

■ INSTALLATION

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

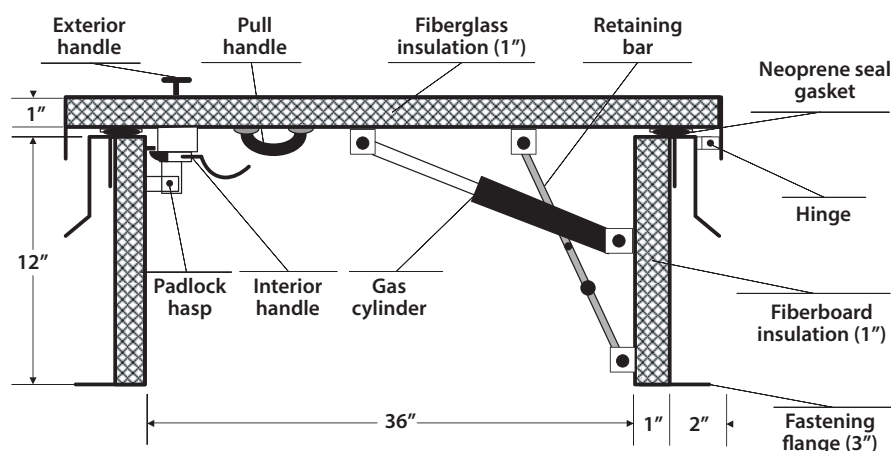

■ DIMENSIONS AND APPEARANCE


Scan  or  Click



To view Pricing and
Additional Product Info.

DOOR SIZE W x H INCHES (MM)	EXTERIOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
36 x 30 (914 x 762)	42 x 36 (1067 x 614)	1	178	81
36 x 36 (914 x 914)	42 x 42 (1067 x 1067)	1	188	85

ROOF OPENING = SIZE OF ROOF HATCH

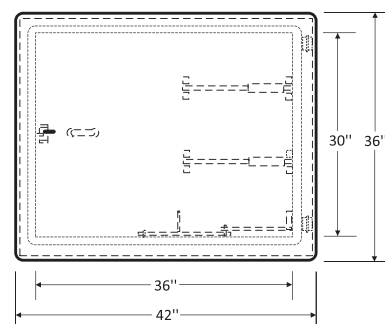

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com