

SUBMITTAL/TECHNICAL DATA SHEET

MILCOR

SPECIFICATIONS

MATERIAL:

- F : 1/4" Aluminum Tread Plate and extruded aluminum frame
- T & Z : 1/8" Aluminum Plate and extruded aluminum frame

FINISH: Mill Finish

COVER:

- F : Diamond patterned safety tread plate designed to support minimum of 200 psf live load.
- T : 1/8" Recessed for floor tile to support minimum of 200 psf live load
- Z : 11/16" Recessed for terrazzo to support minimum of 200 psf live load

FRAME:

- F & T: 1/8" Extruded aluminum frame with integral masonry anchors
- Z : 1/8" fully welded and mitered aluminum frame w/ welded masonry anchors

GASKET: 1/16" Neoprene gasket adhered to frame ledge

LATCH: N/A

HANDLE: Lift Ring for easy access

LIFT ASSISTANCE: N/A

HARDWARE: Stainless steel

SKU: **Z-FD**

NON SECURITY ALUMINUM FLOOR DOOR





DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

STANDARD SIZE AND MODEL NO:

DOOR SIZE	MODEL NO	SHIPPING WEIGHT LBS.
2'0" x 2'0"	F-62	30
2'6" x 2'6"	F-64	35
3'0" x 2'6"	F-66	40
3'0" x 3'0"	F-68	45
2'0" x 2'0"	T-62	30
2'6" x 2'6"	T-64	35
3'0" x 2'6"	T-66	40
3'0" x 3'0"	T-68	45
2'0" x 2'0"	Z-62	40
2'6" x 2'6"	Z-64	45
3'0" x 2'6"	Z-66	50
3'0" x 3'0"	Z-68	55

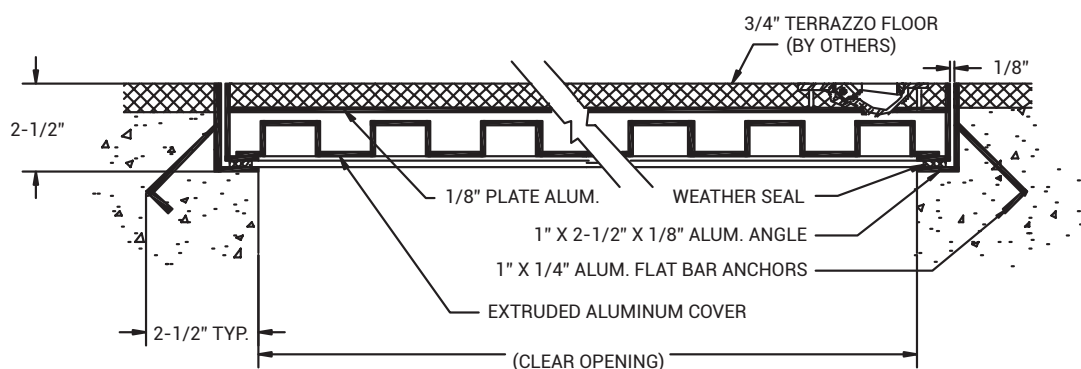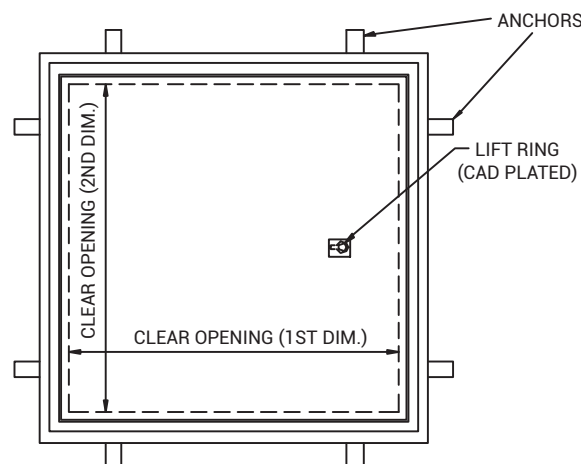

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@accessdoorsandpanels.com