

# SUBMITTAL: MODEL TM™ FLUSH ACCESS PANELS

Model TM is an all-purpose 16 gauge cold rolled steel access door that affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. The 1" frame flange adds rigidity and conceals the rough wall or ceiling openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing, resulting in a door that always closes squarely in place.

## SPECIFICATIONS

**Frame:** 16 gauge steel with 1" flange.

**Door:** 16 gauge steel.

**Finish:** White powder coat paint.

**Lock:** Flush screwdriver-operated steel cam "C" with 1 or more on each side.

**Sizes:** Minimum 6" x 6", maximum 48" x 48". Other size restrictions apply, consult customer service for sizes not shown.

### STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:

\_\_\_\_\_ For sizes not shown on chart. \_\_\_\_\_" W x \_\_\_\_\_" H (See sizes above)

### STEP 2: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:

\_\_\_\_\_ Cold Rolled Steel 14 gauge door with 16 gauge frame

\_\_\_\_\_ Cold Rolled Steel 16 gauge door with 14 gauge frame

\_\_\_\_\_ Cold Rolled Steel 14 gauge door with 14 gauge frame

### STEP 3: SELECT OPTIONS AT ADDITIONAL COST

- Plexiglass View Window
- Rain Hood
- Gasketing
- Removable Door with no hinges
- Optional Color Code \_\_\_\_\_ See page 2
- (L) Cylinder lock installed
- (M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length
- #0646 Brass Retaining Ring for M1 -may be required for locks by others

- (M2) Mortise cam lock (06431) installed
- (U3) Mortise slam lock prep
- (U4) Mortise slam lock (06431) installed
- (B1) Mortise deadbolt prep
- (B2) Mortise deadbolt lock (06441) installed
- (C5) Knob cam
- (C2) Torx head cam [View Lock Options Online](#)
- (C4) Hex head cam
- (C3) Spanner head cam
- Other 1-1/8" dia. mortise cylinder by request: \_\_\_\_\_







See *Separate Submittal* for: Galvanized, Stainless Steel, Double Door Panels or Louvered Vents




Standard Cam Latch

**Order Format Example: TM-2424M2W-**

TM - Width Height Lock (C Std or Optional Lock/Latch Code) - Color - Options

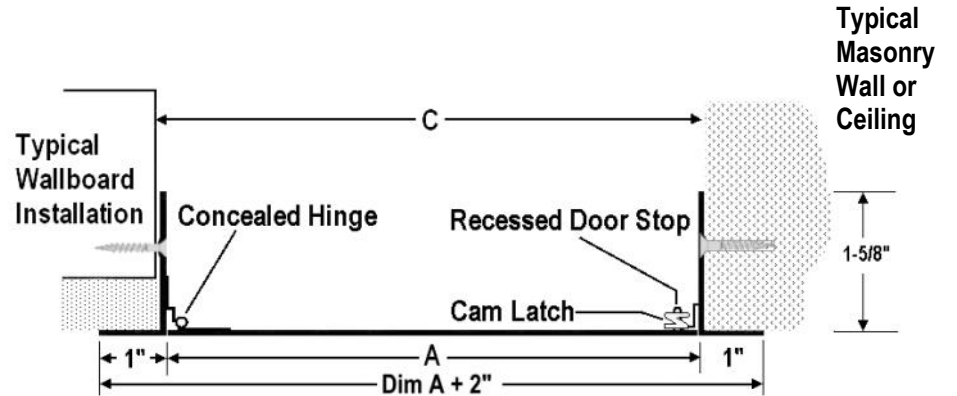
LATCH AND LOCK OPTIONS					
Mortise Lock (M2)(U4)(B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)
					

	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:

# SUBMITTAL: MODEL TM™ FLUSH ACCESS PANELS



Qty	A-Model Size = Door Size	B-Outside Frame Dimensions 1" Trim Flange		C-Opening Dimensions Fits ± 1/8" Opening Size		Approx. Ship Wt. (lbs)	Latch(es)
	Width X Ht	Width	Height	Width	Height		
	6" x 6"	8"	8"	6 1/2"	6 1/2"	4	1
	8" x 8"	10"	10"	8 1/2"	8 1/2"	4	1
	8" x 12"	10"	14"	8 1/2"	12 1/2"	6	1
	10" x 10"	12"	12"	10 1/2"	10 1/2"	6	1
	12" x 12"	14"	14"	12 1/2"	12 1/2"	7	1
	12" x 16"	14"	18"	12 1/2"	16 1/2"	9	1
	12" x 18"	14"	20"	12 1/2"	18 1/2"	10	1
	12" x 24"	14"	26"	12 1/2"	24 1/2"	12	2
	14" x 14"	16"	16"	14 1/2"	14 1/2"	9	1
	16" x 16"	18"	18"	16 1/2"	16 1/2"	11	1
	16" x 20"	18"	22"	16 1/2"	20 1/2"	13	2
	18" x 18"	20"	20"	18 1/2"	18 1/2"	20	3
	20" x 24"	22"	26"	20 1/2"	24 1/2"	15	4
	20" x 30"	22"	32"	20 1/2"	30 1/2"	20	4
	22" x 22"	24"	24"	22 1/2"	22 1/2"	17	4
	22" x 30"	24"	32"	22 1/2"	30 1/2"	22	4
	22" x 36"	24"	38"	22 1/2"	36 1/2"	24	5
	24" x 24"	26"	26"	24 1/2"	24 1/2"	18	4
	24" x 30"	26"	32"	24 1/2"	30 1/2"	22	5
	24" x 36"	26"	38"	24 1/2"	36 1/2"	25	5
	30" x 30"	32"	32"	30 1/2"	30 1/2"	30	5
	36" x 36"	38"	38"	36 1/2"	36 1/2"	41	5
	36" x 48"	38"	50"	36 1/2"	48 1/2"	51	6
<p>Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above                      For Example 16-1/4", 16-1/2" or 16-3/4"                      Minimum Size 6" x 6", Max Size 48" x 48"</p>							



Optional Colors at Additional Cost - Samples Available			
G-Gray	R-Red	BK-Black/FB Flat	SI - Silver
S-Sand	AB-AMS Beige	SB-SC Flat Beige	B-Bronze

Access Doors and Panels  
 www.AccessDoorsAndPanels.com | info@accessdoorsandpanels.com  
 Phone: 1-800-609-2917 | Fax: 1-888-626-2907