

# SUBMITTAL/TECHNICAL DATA SHEET



## DESCRIPTION

The Architectural Access Door is designed with the architect in mind. Constructed with an industry-standard 16 gauge steel door, the updated design provides superior strength and design aesthetics.

## FEATURES

- Anti-flex frame
- Removable and repositionable door
- Painless installation
- Optional stainless steel
- Double door available

## SPECIFICATIONS

MODEL: BNT/BNW/BNP

**DOOR:**  
 BNT/BNW: 16 gauge Steel (removable) or 16 gauge Type 304 Stainless Steel  
 BNP: 14 gauge Steel or 16 gauge Type 304 Stainless Steel

**FRAME:** 16 gauge Steel or 16 gauge Type 304 Stainless Steel

**SIZE:**  
**SINGLE DOOR**  
 Minimum: 6 inches by 6 inches  
 Maximum: 24 inches by 72 inches or 48 inches by 48 inches  
**DOUBLE DOOR**  
 Minimum: 24 inches by 24 inches  
 Maximum: 36 inches by 72 inches or 48 inches by 64 inches or 72 inches by 48 inches

**INSTALLATION:** Wall or Ceiling

**FLANGE:** 1 inch exposed, Drywall Bead or Plaster Bead

**HINGE:** Concealed spring button or Flush continuous piano

**PAN DEPTH:** 1/2 inch

**LATCH:** Screwdriver Cam Latch, Key Operated Cam Latch, or Mortise Lock (1-1/8 inch) Prep

**FINISH:** White Powder Coat (steel) or #4 Satin (stainless steel)

**WARRANTY:** 1 year

For a complete list of options visit [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)



SKU: **BNP**

## ARCHITECTURAL ACCESS DOOR

## DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

### ORDER GUIDE:


BASE	FLANGE	LATCH	WIDTH X LENGTH	OPTIONS
<b>BN</b>			<b>STANDARD SIZES (W XL)</b>	
			6" X 6" 16" X 20" 24" X 36"	<b>B</b> - Galvannealed <b>F14</b> - 14 gauge frame & door <b>L</b> - Louvered Door <b>S</b> - Type 304 Stainless Steel <b>D14</b> - 14 gauge door <b>D</b> - Double door
			8" X 8" 18" X 18" 24" X 48"	
			10" X 10" 18" X 24" 30" X 30"	
			12" X 12" 20" X 30" 30" X 36"	
			12" X 18" 22" X 22" 32" X 32"	
			12" X 24" 22" X 30" 36" X 36"	
			14" X 14" 24" X 24"	
			16" X 16" 24" X 30"	
	<b>T</b> - 1 inch Flange	<b>C</b> - Screwdriver Cam Latch		
	<b>W</b> - Drywall Bead	<b>L</b> - Key Operated Cam Latch		
	<b>P</b> - Plaster Bead	<b>M</b> - Mortise Lock Prep (1-1/8")		

Double doors are available (Some options may not be available)  
 Rough opening is door size + 1/4 inch  
 Additional sizes available, call for more information.  
 Lead Time Average is 1-10 Days. Delivery time is additional.

For Detailed Specifications See Submittal Sheet

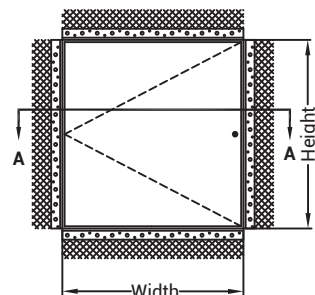

**CUT-THRU SECTION**  
 NOT TO SCALE

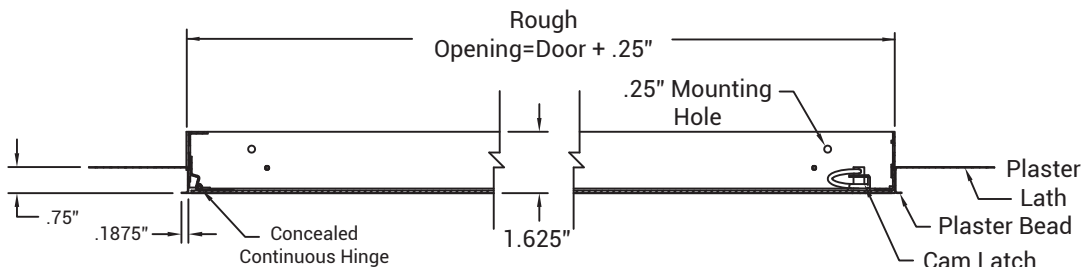

## PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan or Click



To view Pricing and Additional Product Info.

TELEPHONE:  
 1-888-457-1275  
 FAX:  
 1-888-626-2907



PO BOX 66738 #76520,  
 SAINT LOUIS, MO  
 63166-6738  
 USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
 E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)