SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

MI-SAD medium security access door is designed for drywall, masonry, or concrete construction, providing the security required in today's schools, hospitals, hotels, and correctional institutions. It has a unique white finish.

SPECIFICATIONS

MATERIAL:
MI-SAD Series is 12 gauge steel door and 3/16" angle steel frame.
The MI-SADSS Stainless Steel Series is 12 gauge #304 stainless steel door and 3/16" (4) angle stainless steel frame.

DOOR: Flush to frame.

FRAME:
3/16" (4) x 1 1/2" (38) x 1 1/2" (38) angle steel, angle welded with joints ground smooth. The frame has pre-punched 3/16" (4) mounting holes for easy installation.

HINGE:
Two heavy duty butt hinges welded to the door and frame.

SPRING:
Heavy duty.

LATCH:
Standard - Cylinder key lock. All of MIFAB's cylinder key locks are keyed alike.

FINISH: Satin coat steel doors have a primed white finish. Stainless steel doors have a #4 brush satin finish.

PACKAGING: Individual pack.

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **MI SAD**

MEDIUM SECURITY ACCESS DOOR

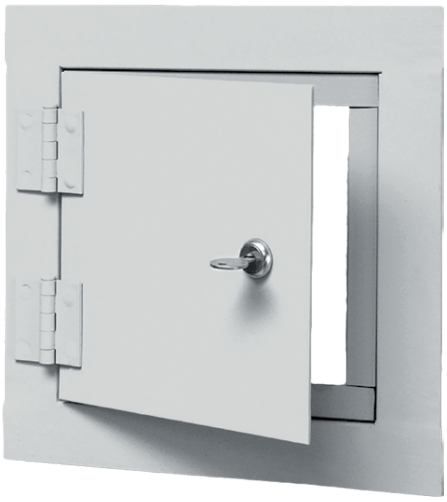

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

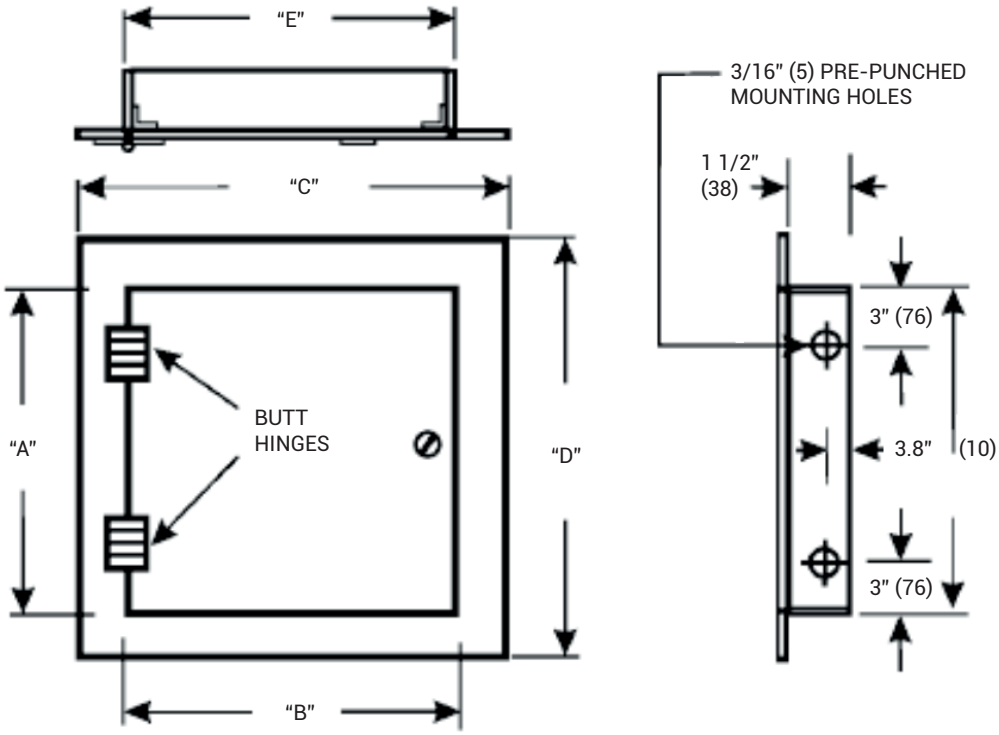

For detailed specifications see submittal sheet

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click

To view Pricing and Additional Product Info.

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907

PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA

WEBSITE:
www.AccessDoorsAndPanels.com

E-MAIL:
info@AccessDoorsAndPanels.com

MIFAB®
SUBMITTAL
TELEPHONE: 1-888-457-1275
FAX: 1-888-626-2907
PO BOX 66738 #76520, SAINT LOUIS, MO 63166-6738 USA
WEBSITE: www.AccessDoorsAndPanels.com
E-MAIL: info@AccessDoorsAndPanels.com

MI SAD MEDIUM SECURITY ACCESS DOOR

"B" X "A"	WALL OPENING	SHIP WEIGHT (Lbs.)	LATCHES	MILD STEEL MODEL #	STAINLESS STEEL MODEL #
8" x 8"	8 1/2" x 8 1/2"	10.0	1	MI-SAD0808	MI-SADSS0808
10" x 10"	10 1/2" x 10 1/2"	11.0	1	MI-SAD1010	MI-SADSS1010
12" x 12"	12 1/2" x 12 1/2"	17.0	1	MI-SAD1212	MI-SADSS1212
14" x 14"	14 1/2" x 14 1/2"	20.0	1	MI-SAD1414	MI-SADSS1414
16" x 16"	16 1/2" x 16 1/2"	24.0	1	MI-SAD1616	MI-SADSS1616
18" x 18"	18 1/2" x 18 1/2"	28.0	1	MI-SAD1818	MI-SADSS1818
18" x 24"	18 1/2" x 24 1/2"	34.0	1	MI-SAD1824	MI-SADSS1824
22" x 22"	22 1/2" x 22 1/2"	37.0	1	MI-SAD2222	MI-SADSS2222
24" x 24"	24 1/2" x 24 1/2"	41.0	1	MI-SAD2424	MI-SADSS2424
24" x 30"	24 1/2" x 30 1/2"	50.0	1	MI-SAD2430	MI-SADSS2430
24" x 36"	24 1/2" x 36 1/2"	56.0	2	MI-SAD2436	MI-SADSS2436
30" x 30"	30 1/2" x 30 1/2"	60.0	2	MI-SAD3030	MI-SADSS3030
36" x 36"	36 1/2" x 36 1/2"	75.0	2	MI-SAD3636	MI-SADSS3636

A-B	Door Size
C-D	Overall Dimensions - Door Size - Plus 3" (76)
E-F	Wall opening - Door Size - Plus 3/8" (10)

SUFFIX	OPTIONAL VARIATIONS
☐ - BA	Buy American Act compliant product
☐ - PA	Pennsylvania Steel Act compliant product

(Dimension) Denotes Millimetres
Note: The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.

CALIFORNIA PROPOSITION 65 WARNING.
This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.