

DESCRIPTION

The B10 is a universal, non-rated access door. A 14 ga/2 mm galvanized steel, formed door provides strength and rigidness, and features a screwdriver operated cam latch closure. The door is fully detachable and suitable for left- or right-hand operation.

The 16 ga/1.6 mm galvanized steel frame provides a smooth transition to almost any installation surface. Four riveted wall anchors ensure a quick and safe installation for any non-rated wall or ceiling application.

ADVANTAGE

- Fast delivery
 Economical solution
- Quick and easy installation Superior engineering and innovative design

OPTIONS

Screwdriver operated cam latch - SD3





DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

DIMENSIONS:

B10 metal panels with screwdriver operated cam latch are available in the following standard sizes:

SUBMITTAL/TECHNICAL DATA SHEET


•			•		
SYSTEM B10	DIMENSIONS				
CODE	A inch mm	B inch mm	C inch mm	D inch mm	E inch mm
BSD200200W	8" 203	8" 203	10.12" 257	10.12" 257	1.58" 40
BSD300300W	12" 305	12" 305	14.13" 359	14.13" 359	1.58" 40
BSD400400W	16" 406	16" 406	18.11" 460	18.11" 460	1.58" 40
BSD500500W	20" 508	20" 508	22.13" 562	22.13" 562	1.58" 40
BSD600600W	24" 610	24" 610	26.14" 664	26.14" 664	1.58" 40

CAPABILITIES:

Universal, galvanized sheet metal access door can be mounted in non-rated walls and ceilings.

COLOR:

White powder coat finish.

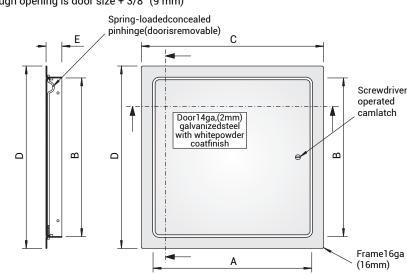

For a complete list of options visit www.AccessDoorsAndPanels.com



To view Pricing and Additional Product Info.

PROJECT DATA

Custom Sizes Available - Fast! PROJECT NAME QTY w н OPTIONS ARCHITECT DEALER CONTRACTOR LOCATION SPECIAL INSTRUCTIONS DATE SUBMITTAL APPROVAL TAGGING INSTRUCTIONS (signature or stamp)





PO BOX 66738 #76520, SAINT LOUIS, MO 63166-6738 USA



WEBSITE: www.AccessDoorsAndPanels.com

E-MAIL: info@accessdoorsandpanels.com

Rough opening is door size + 3/8" (9 mm)