



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

For the most unobtrusive appearance, the CTW Series is designed for an inset of gypsum wallboard to cover the door panel with exposure of only the narrow frame edges. Door is recessed to accommodate up to a 1/2" drywall insert. Attach the wallboard to the door with adhesive and ensure that it is flush with surrounding wallboard. A continuous hinge located at the outside edge of the door, ensures easy opening of the panel. Wallboard bead allows smooth finish to edge of frame.

SPECIFICATIONS

DOOR PANEL: 16 gauge steel, recessed to accommodate 1/2" drywall.

FRAME: 14 gauge steel with 1" wide wallboard bead.

FINISH: White powder paint.

HINGE: Continuous recessed hinge mounted on the long side of oblong panels.

LOCK: Flush screwdriver-operated steel cam standard.

SIZES:
Minimum 8" x 8" (203 x 203 mm),
Maximum 36" x 36"

OPTIONAL FEATURES

- Cylinder lock installed (L)
- Torx head cam (C2)
- Spanner head cam (C3)
- Hex head cam (C4)
- Mortise cam lock prep 1-1/8" dia, 1-1/4" L (M1)
- Mortise cam lock (06431) installed (M2)
- 14 gauge frame and 14 gauge door
- Optional color Code -

OPTIONAL FEATURES AT ADDITIONAL COST

For a complete list of options visit
www.AccessDoorsAndPanels.com

SKU: **CTWB**


FLUSH ACCESS PANELS

WITH RECESS FOR WALLBOARD INSERT



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

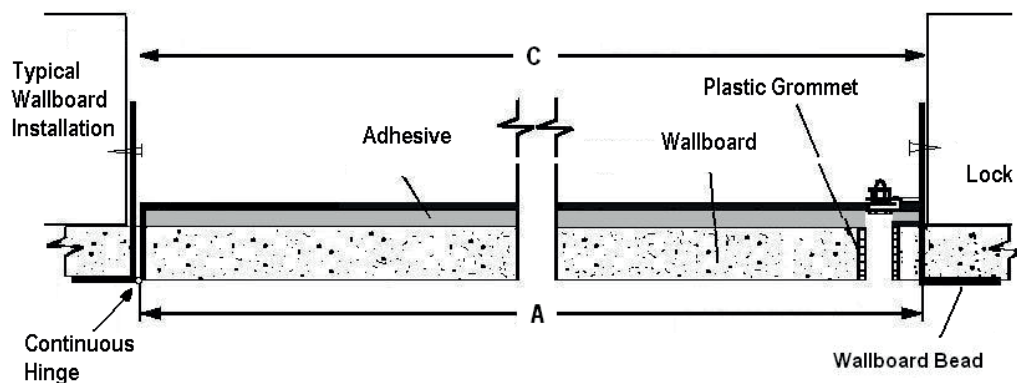

Panel shown partially-covered by wallboard above




Standard Cam Latch



Cylinder Lock (L)



Torx Head Cam (C2)



Spanner Head Cam (C3)

Standard Color is White, Optional Colors at Additional Cost



For detailed specifications see submittal sheet




Hex Head Cam (C4)



Mortise Lock (M2)

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or 



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com



CTWB

CONCEALED FRAME FLUSH ACCESS PANEL
WITH RECESS FOR WALLBOARD INSERT

STANDARD SIZES:

A - MODEL SIZE = DOOR SIZE WIDTH X HEIGHT	C - WALL OPENING DIMENSIONS		APPROX. SHIPPING WEIGHT	LATCH (ES)
	WIDTH	HEIGHT		
12" x 12"	12 1/4"	12 1/4"	9 lbs	1
12" x 24"	12 1/4"	24 1/4"	14 lbs	2
18" x 18"	18 1/4"	18 1/4"	15 lbs	3
22" x 30"	22 1/4"	30 1/4"	26 lbs	4
24" x 24"	24 1/4"	24 1/4"	24 lbs	4
24" x 36"	24 1/4"	36 1/4"	35 lbs	5
36" x 36"	36 1/4"	36 1/4"	53 lbs	6

MATERIAL:

CT	Steel
CT G	Galvanized (Additional Cost)

