

SUBMITTAL/TECHNICAL DATA SHEET



SPECIFICATIONS

01. Frame with capflashing (corners full welded)
 - E-20 - 14 gauge P.B. Galv. steel
 - E-40 - 14 gauge P.B. Galv. steel
 - E-50 - 11 gauge aluminum
02. Pintle hinge
03. Gasket (All around cover)
04. Cover gauge
 - E-20 - 14 gauge P.B. Galv. steel
 - E-40 - 11 gauge aluminum
 - E-50 - 11 gauge aluminum
05. Cover liner
 - E-20 - 22 gauge P.B. Galv. steel
 - E-40 - 18 gauge aluminum
 - E-50 - 18 gauge aluminum
06. Spring lifting mechanism
07. 1" Rigid fiberglass cover insulation
08. Slam latch
09. Inside and outside handles with padlock hasps
10. Arm guide bracket
11. 1" Thick fiberglass cover insulation
12. Hold open arm with red vinyl grip
13. Neoprene gasket
14. Lock strike & padlock hasp
15. Bilclip® flashing system

SHOP FINISH:

STEEL: red oxide primer
ALUMINUM: mill finish
HARDWARE: non-corrosive materials
(Unless otherwise specified)

This product may be installed on either a flat or sloping roof. When installed on a slope, the hinge side must run parallel with the slope. If slope exceeds 30°, advise factory for modification.

For a complete list of options visit
www.AccessDoorsAndPanels.com

QTY	TYPE	MATERIAL
☐	E-20	STEEL COVER/STEEL FRAME
☐	E-40	ALUM. COVER/STEEL FRAME
☐	E-50	ALUM. COVER/ALUM. FRAME

TYPE E SIZE 3'-0" X 3'-0" (WIDTH X HEIGHT)

SKU: **E20**




SINGLE LEAF ROOF SCUTTLE

TYPE E




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

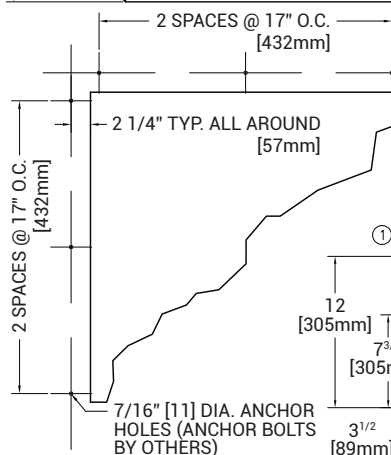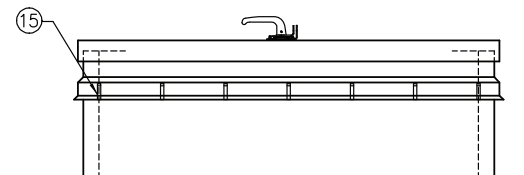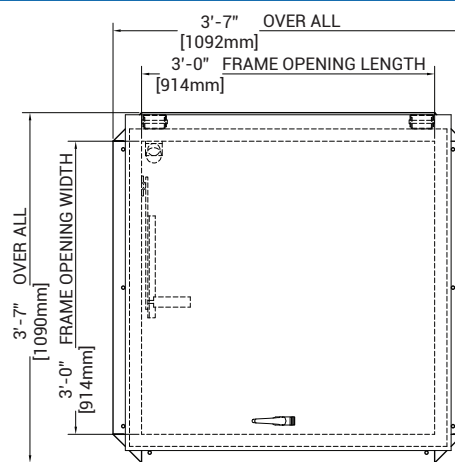

ANCHOR HOLE LAYOUT

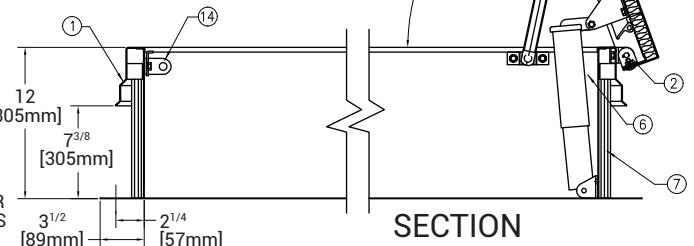

SECTION

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com