



JL INDUSTRIES

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

The Extendable Safety Ladder Post provides a convenient and safe method for to climb on and off fixed access ladders through a roof hatch.

SPECIFICATIONS

POST MATERIAL: Mild steel square tubing 1-1/2" x 1-1/2" x 1/8".

LOCKING BRACKET MATERIAL: .20" Steel Plate
Clamping Bracket Material: .25" Steel Plate.

FINISH: Yellow powder coat.

SPRING TYPE: Stainless steel constant force power spring.

HARDWARE KIT INCLUDED: Zinc-plated steel U bolts, 3/8" zinc plated steel nylon insert locknuts and washers.

LADDER REQUIREMENTS: Round or square rungs in sizes 3/4" - 1-1/4" spaced 12" apart. When mounted, the rung centers must allow at least a 7" foot clearance, as required by OSHA.

WEIGHT: 25 LBS.

LOAD: Tested to 250lb concentrated load.



SKU: **LP-4**

EXTENDABLE RUNG-MOUNTED LADDER POST



DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

MODEL	MATERIAL	TYPE
LP-4	Steel	Yellow Powder coat

NOTES:

The ladder post is furnished completely assembled ready to mount on a fixed vertical ladder that is structurally sound and securely anchored.

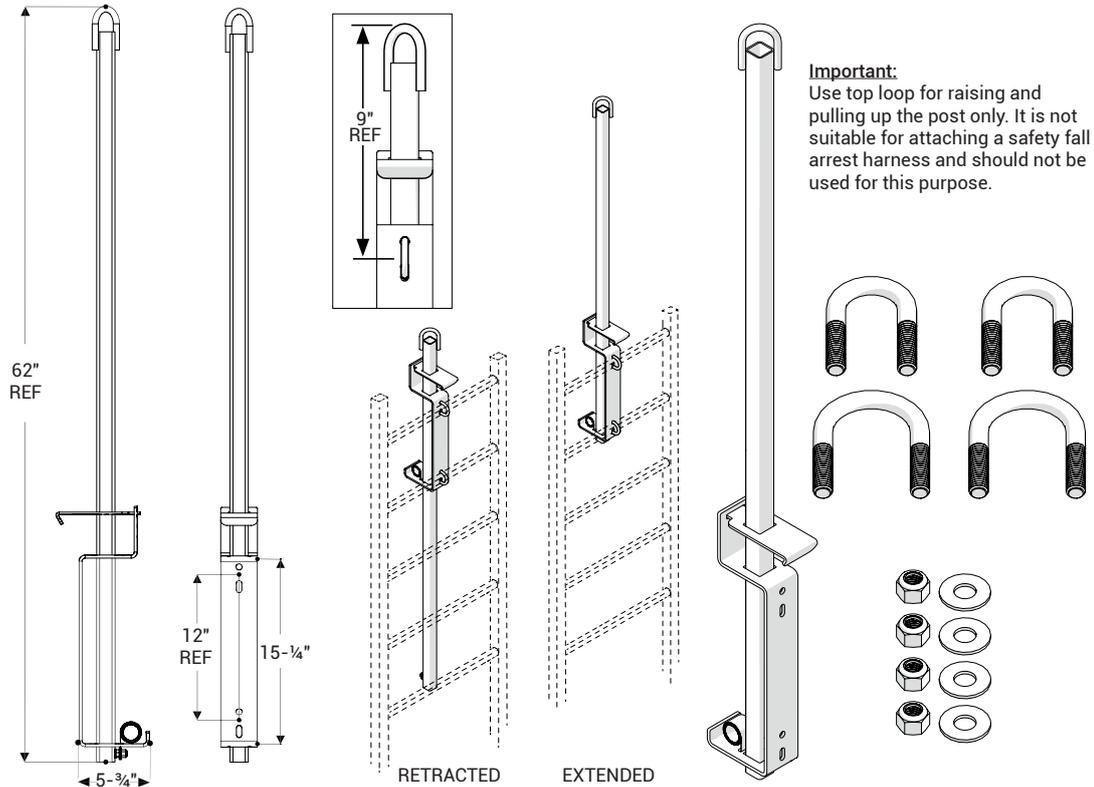

For a complete list of options visit www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click



To view Pricing and Additional Product Info.



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com