



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

MDW access door is designed for installation after the drywall has been applied and when a concealed outer flange is required. The outer frame has a galvanized drywall taping bead. Drywall cement can be applied over the beading at the same time as the wallboard joints and corners. Only the door is visible. It has a unique white finish.

SPECIFICATIONS

MATERIAL: MDW Series is 16 gauge satin coat steel door and 16 gauge satin coat steel frame. The MDWSS Stainless Steel Series is 16 gauge #304 stainless steel door and frame.

DOOR: Flush to frame. Turned back around edges for extra rigidity

FRAME: Drywall taping bead on all sides.

HINGE: Concealed pivot pins

STANDARD LOCK: Flush mounted, screwdriver operated cam


OPTIONAL LOCK: Allen key, cylinder key, paddle latch, or vandal resistant latch. All of MIFAB's cylinder key locks are keyed alike

FINISH: Satin coat steel doors have a primed white finish. Stainless steel doors have a #4 brush satin finish.

PACKAGING: Individual pack


SKU: **MDW**

DRYWALL BEAD ACCESS DOOR

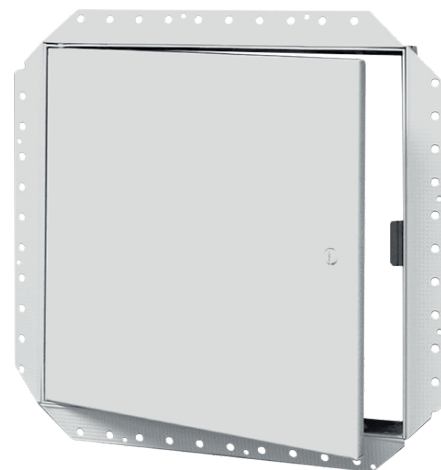

DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

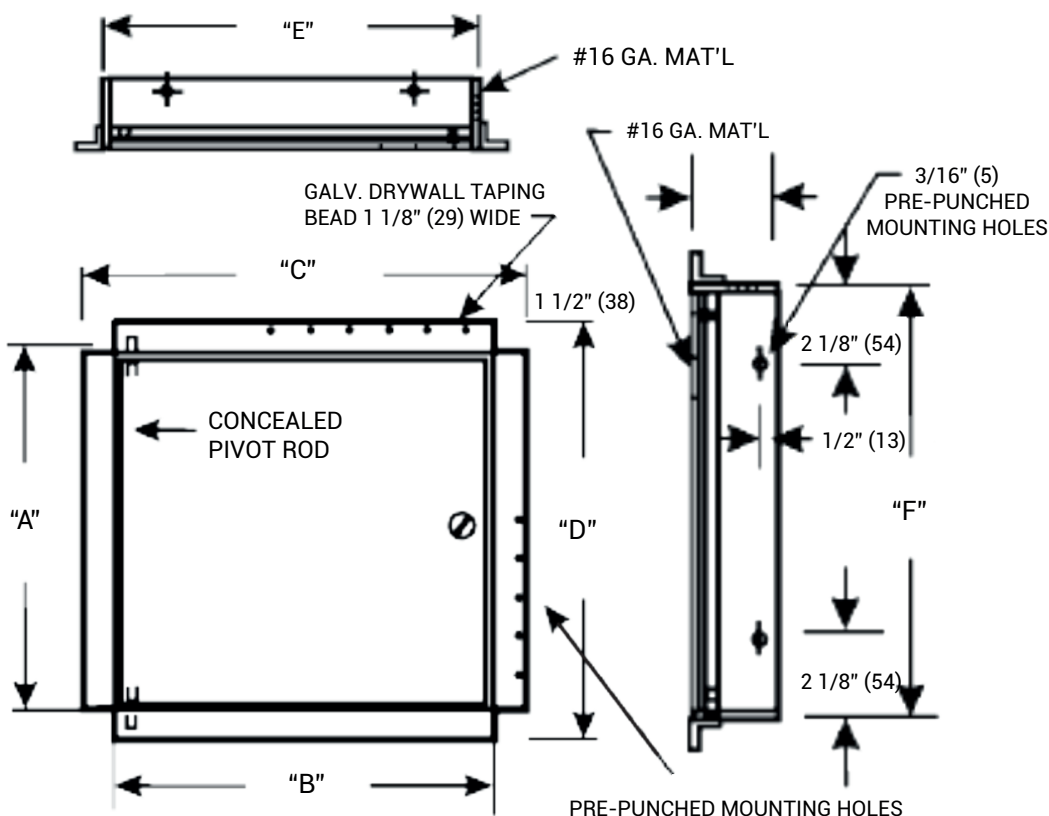

For detailed specifications see submittal sheet

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com

MDW

DRYWALL BEAD ACCESS DOOR

"B" X "A"	WALL OPENING	SHIP WEIGHT (Lbs.)	LATCHES	MILD STEEL MODEL #	STAINLESS STEEL MODEL #
8" x 8"	8 3/8" x 8 3/8"	3.5	1	MDW0808	MDWSS0808
10" x 10"	10 3/8" x 10 3/8"	4.5	1	MDW1010	MDWSS1010
12" x 12"	12 3/8" x 12 3/8"	6.0	1	MDW1212	MDWSS1212
14" x 14"	14 3/8" x 14 3/8"	7.0	1	MDW1414	MDWSS1414
16" x 16"	16 3/8" x 16 3/8"	8.0	1	MDW1616	MDWSS1616
18" x 18"	18 3/8" x 18 3/8"	12.0	3	MDW1818	MDWSS1818
22" x 22"	22 3/8" x 22 3/8"	14.0	3	MDW2222	MDWSS2222
24" x 24"	24 3/8" x 24 3/8"	17.5	3	MDW2424	MDWSS2424
24" x 36"	24 3/8" x 36 3/8"	21	5	MDW2436	MDWSS2436
30" x 30"	30 3/8" x 30 3/8"	22	5	MDW3030	MDWSS3030
36" x 36"	36 3/8" x 36 3/8"	32	5	MDW3636	MDWSS3636

- A-B** Door Size
C-D Overall Dimensions - Door Size - Plus 2 1/4" (57)
E-F Wall opening - Door Size - Plus 1/2" (13)

SUFFIX	OPTIONAL VARIATIONS
■ - A	Allen key lock
■ - BA	Buy American Act compliant product
■ - C	Cylinder key lock
■ - PA	Pennsylvania Steel Act compliant product
■ - PL	Paddle latch
■ - VP	Vandal resistant hardware (VP Screwdriver included)
■ - WR	Water Resistant

(Dimension) Denotes Millimetres

Note: The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.

CALIFORNIA PROPOSITION 65 WARNING.

This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.