

DESCRIPTIONS

Similar to the Type Tin function, these single and double leaf doors are designed with a pan cover to accept a variety of flooring materials up to 1 "(25.4mm) in thickness. Each door is spring balanced at the factory to ensure smooth, easy operation upon installation of the specified flooring material in the field. Note: Available with drain coupling for drainage applications.

SPECIFICATIONS

MATERIAL:

1/4" (6.35mm) cover and extruded aluminum frame.

COVER:

Smooth plate reinforced for 150 psf (732 kg/m2) live load. Cover designed with 1" (25.4mm) fillable pan for field installation of architectural flooring material (specify flooring material including type, thickness and weight).

FRAME:

Extruded aluminum frame with built in anchor flange around the perimeter.

HINGES:

Continuous heavy-duty Type 316 stainless steel hinge

LATCH:

Type 316 stainless steel slam lock with fixed interior handle and removable exterior turn/lift handle. Latch release is protected by a flush, gasketed, removable screw plug.

LIFT ASSISTANCE:

Compression spring operators enclosed in telescopic tubes. Automatic hold-open arm with grip handle release.

FINISH:

Mill finish aluminum with a bituminous coating applied to the exterior of the frame

HARDWARE:

Engineered composite compression spring tubes. Steel compression springs. Type 316 stainless steel hinges. All other hardware is zinc plated/chromate sealed.

For a complete list of options visit www.AccessDoorsAndPanels.com

Scan or (m) Click

SKU: TRD PAN TYPE FLOOR ACCESS DOOR

SUBMITTAL/TECHNICAL DATA SHEET

■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES AND WEIGHTS

SIZE		ALUMINUM		
Weight x Length		Model #	Weight	
inches	mm	iviodel#	lbs.	kg.
24 X 24	610 X 610	TER-1	100	45
30 X 30	762 X 762	TER-2	110	50
36 X 30	914 X 762	TER-3	120	54
36 X 36	914 X 914	TER-4	130	59
42 X 42	1067 X 1067	TER-5	165	75
48 X 48	1219 X 1219	TED-2	200	91
48 X 72	1219 X 1829	TED-4	275	125
60 X 60	1524 X 1524	TED-5	285	129


Models with "D" in the Model # indicate Double leaf configuration

EXTRUDED ALUMINUM FRAME WITH ANCHOA FLANGE

NEOPRENE


LOCK STRIKE

CUSHION

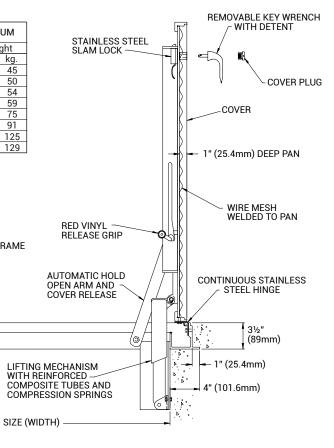

■ PROJECT DATA

Custom Sizes Available - Fast!

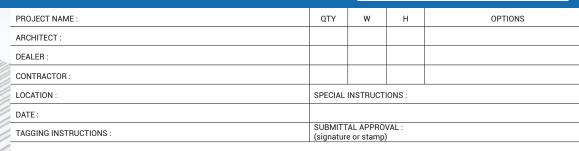



To view Pricing and Additional Product Info.



TELEPHONE: 1-888-457-1275 FAX: 1-888-626-2907



PO BOX 66738 #76520, SAINT LOUIS, MO 63166-6738 USA



WEBSITE:

www.AccessDoorsAndPanels.com