



# SUBMITTAL/TECHNICAL DATA SHEET

**Weather Strip Removable Access Doors** are designed with flush gaskets between the panel and frame to ensure flush air seal in all types of walls and ceilings.  
Note: Door has **NOT** been tested for air tightness.

**Door and Frame** shall be 16 gauge galvanized steel with a white prime coat finish.

**Frame** is a one piece construction 1" wide and produces perfect concealment of the rough wall openings. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and giving maximum clearance.

**Door** is fully removable and held in place by multiple latches.

**Latch** is a screwdriver operated.

**Finish** is a white prime coat suitable for painting.

SKU: **WSR**

## WEATHER STRIP REMOVABLE ACCESS DOORS



## GUIDE SPECIFICATION

Weather Strip Removable access door and frame shall be gasketed between the panel and frame to ensure flush air seal in all types of walls and ceilings. Access door and frame shall be fabricated from 16 gauge, galvanized steel with a white prime coat finish. The door shall have rounded safety corners. Frame shall be one piece construction with no miters or welds on the face. Latches shall be screwdriver operated. Finish shall be a white prime coat suitable for painting.

## MODEL NUMBER AND OPTIONS SELECTION

### BASE MODEL NUMBER

☐ -WSR Weather Strip Removable Access Door

### SUFFIX OPTIONS

- ☐ -AKL Allen Key Latch
- ☐ -TH 'T' Handle
- ☐ -CL Cylinder Lock (one per door)
- ☐ -CLD Cylinder Lock with Dust Shutter (one per door)
- ☐ -SS Stainless Steel Construction (Type 304 No. 4 Satin Finish)



For a complete list of options visit  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

## DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

### STANDARD SIZES:

DOOR SIZE (W X H)	WALL OPENING	LATCHES	WEIGHT LBS
WSR 8" x 8"	8-1/2" x 8-1/2"	4	3.0 lbs.
WSR 10" x 10"	10-1/2" x 10-1/2"	4	4.0 lbs.
WSR 12" x 12"	12-1/2" x 12-1/2"	4	5.5 lbs.
WSR 14" x 14"	14-1/2" x 14-1/2"	4	6.0 lbs.
WSR 16" x 16"	16-1/2" x 16-1/2"	4	7.5 lbs.
WSR 18" x 18"	18-1/2" x 18-1/2"	4	9.0 lbs.
WSR 24" x 24"	24-1/2" x 24-1/2"	4	15.0 lbs.

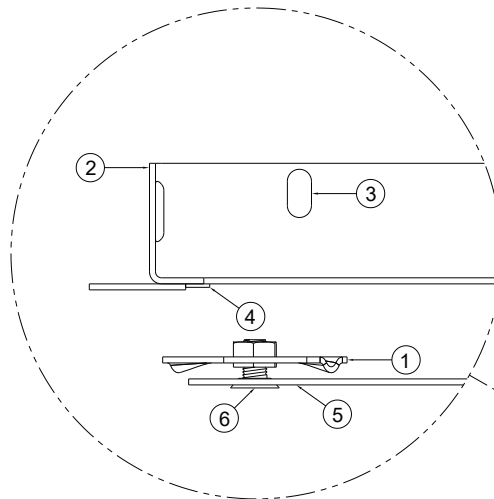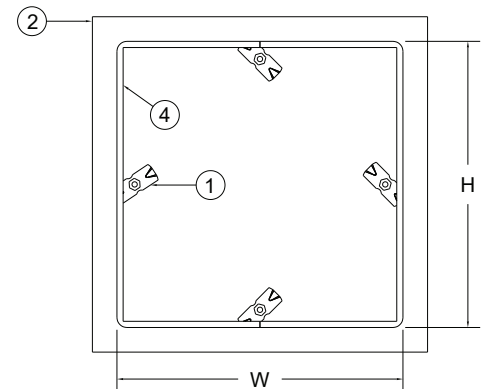

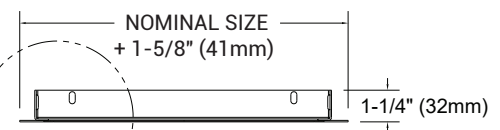

1. FRAME MOUNTING HOLE
2. LATCH ASSEMBLY
3. FRAME
4. WEATHER STRIP GASKET
5. 16 GAUGE DOOR PANEL
6. SLOTTED FLAT HEAD SCREW



## PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and  
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)